



Specification

Mon May 15 21:53:01 CEST 2017

CombiMaster® Plus 202 G (20 x 18 x 26 inch/40 x 12 x 20 inch)



Capacity

- Twenty (20) full-size sheet pans (18"x26") or Forty (40) Steam table pans (12"x20"x2.5") GN1/1
- Mobile oven rack (rail spacing 2 1/2"/63 mm) with tandem castors, wheel diameter 5"/125 mm

Standard Features

- Gas heated device for cooking of meat, poultry, fish, side dishes, vegetables, egg dishes, desserts, bakery products and for automatic rethermalization
- Combi-steamer according to DIN 18866, DIN 10535 for selective use of steam and hot air, separately, sequentially, or combined
- 2-Year parts and labor warranty
- 5-Year steam generator warranty
- No-charge 4-hour RATIONAL certified chef assistance program
- Probe for core temperature measurement
- ClimaPlus® – humidity measurement, 5 stage setting and regulation

- Combi-steamer mode °F/(°C): steam: 85 to 265/(30 to 130), hot air: 85 to 575/(30 to 300), combination: 85 to 575/(30 to 300)
- Individual programming of at least 100 cooking programs with up to 6 steps transferable via USB
- High-performance fresh steam generator, pressureless
- 5 programmable fan speeds
- Integral, maintenance-free grease extraction system with no additional grease filter
- Single water connection as shipped, can be split connection for treated and untreated water
- Turbo fan cool down function
- Dynamic air mixing
- Automatic adaptation to the installation location (elevation)
- Unit door with rear-ventilated double-glass panel and hinged inner panel
- Height adjustable feet +- 3/8" (10 mm)
- 304 (DIN 1.4301) stainless steel material inside and out
- Seamless interior and with rounded corners
- Temperature units can be set in °F/(°C)
- Digital temperature display
- Digital timer, 0-24 hours with permanent setting
- USB Interface
- Demand-related energy supply

Operation

- Mode selector for cooking modes, separate controls for temperature, core temperature and time settings
- LED illuminated display, visible from a distance
- Clear control panel

Safety features

- Detergent and rinse tabs (solid detergents) for optimum working safety
- VDE approved for unsupervised operation
- HACCP data output and software update via integral USB port
- Safety temperature limiter for steam generator and hot-air heating
- Maximum rack height 5 1/4 ft./1.60 m
- Integral fan impeller brake
- Splash an hose-proof to IPX5

Cleaning & care

- 3 automatic cleaning programs
- Service Diagnostic system (SDS) with automatic service notices displayed
- Menu-guided user descaling program
- Hand shower with automatic retracting system

Approval/Labels





Specification

Mon May 15 21:53:01 CEST 2017

CombiMaster® Plus 202 G (20 x 18 x 26 inch/40 x 12 x 20 inch)

Combi-Steamer mode



Steam between 85-265 °F (30-130 °C)



Hot-air from 85-575 °F (30-300 °C)



Combination of steam and hot-air 85-575 °F (30-300° C)

ClimaPlus



Climate management - humidity measurement, 5-stage setting and regulation

Technical Specification

Dimensions	Width	Depth	Height
Exterior	42 5/8" (1,084 mm)	41 1/4" (1,047 mm)	70 1/8" (1,782 mm)
Incl. Vent/Handle	-	43 7/8" (1,114 mm)	72 7/8" (1,850 mm)
Shipping	48" (1,220 mm)	46 1/2" (1,180 mm)	79 1/2" (2,020 mm)

Weight

Max Per Shelf	66 lbs
Max Load Size	397 lbs
Net	802 lbs
Shipping	861.5 lbs

Size	Electric. 60 hz	Breaker	Cable connection	Running Amps
202	208V 1 PH	15 A	6-15P	7.69 amps
202	240V 1 PH	15 A	6-15P	6.67 amps

Gas units are supplied with 8 ft. 14-3 AWG cord and plug. 120V 1Ph L1, N, G or 208/240V 1 Ph L1, L2, G (208V is field retrofittable to 240V). Dedicated 2 pole circuit breaker required. Due to GFCI having a 4-6mA tolerance, 208/240V is recommended. Do not use fuses. Special voltages available upon request.

Thermal load and airflow requirements

Latent	3218 W
Sensible	3788 W
Unit free standing	79211 ft ² /h
One side against a wall	49900 ft ² /h
Noise values	70 dBA

Rated thermal load

	Natural gas	Liquid gas LPG
Total:	340,000 BTU	333,500 BTU
Steam:	193,300 BTU	189,100 BTU
Hot air:	340,000 BTU	333,500 BTU

Connected load electric: 1.6 kW

Water Requirements

Connection	3/4"
Supply	Minimum 1/2" ID Drinking Quality Cold
Pressure	21-87 psi (1.5-6 bar)
Average Water Consumption	4.2 gal/h
Min/Max Flow Rate	3 gpm/6.59 gpm
Water Drain	2" OD (50 mm) hub

Connect only to 2" (XS type 6 2/3 = 1 5/8") high-temperature resistant pipe. Water discharge temperature can be field adjusted to meet section 701.7 of the Inter-national Plumbing Code. Contact RATIONAL for back flow recommendation.

Water Quality

Sodium ion exchangers are not recommended; H+ Ion exchange systems are recommended. Water that does not meet the following minimum standards will require the proper conditioning.

Contaminant	Water Requirements	If > than recommended
Sand/Particles	< 15 µm	Particle filter
Chlorine (Cl ₂)	< 0.12 gr/gal (0.2 ppm)	Active carbon filter
Chloride (Cl ⁻)	< 4.68 gr/gal (80 ppm)	RO or deionization

Clearance Requirements

To facilitate servicing, we recommend leaving a 18"-20" (450-500 mm) gap on the left-hand side of the unit. If there is not 18"-20" (450-500 mm) left side clearance available, provisions for moving the unit or appliance to the left for service access must be made. These include, but are not limited to, having quick connections (water, gas, etc.) and lengthened electrical connections with flexible cords. If there are no external heat sources acting on the unit, there should be a minimum gap of 2" (50 mm) to the left, right, and back of unit. If a high temperature heat source is on the left side of the unit, the left-hand gap must be a minimum of 14" (350 mm). This gap may be reduced to 2" (50 mm) by using a heat shield (see options). Recommended clearance from unobstructed rear exhaust pipes and any surface collecting grease or flammable material; 16" (400 mm) gas, 10" (254 mm) electric. It is recommended to have a hood overhang of 6" (150 mm) to 18" (450 mm) at the front of the unit and 6" (150 mm) on the side if installed at the end of the cooking line. Please refer to the Installation Manual for further technical data and for instructions on installation and setup. Installations must comply with all local electrical, plumbing, and ventilation codes.

RATIONAL USA Inc.

1701 Golf Road, Suite C-120, Commerce
Rolling Meadows, IL 60008
Toll Free: 888-320-7274, Fax.: 847-755-9583

Visit us on the internet: www.rationalusa.com


We reserve the right to make technical improvements



Specification

Mon May 15 21:53:01 CEST 2017

CombiMaster® Plus 202 G (20 x 18 x 26 inch/40 x 12 x 20 inch)

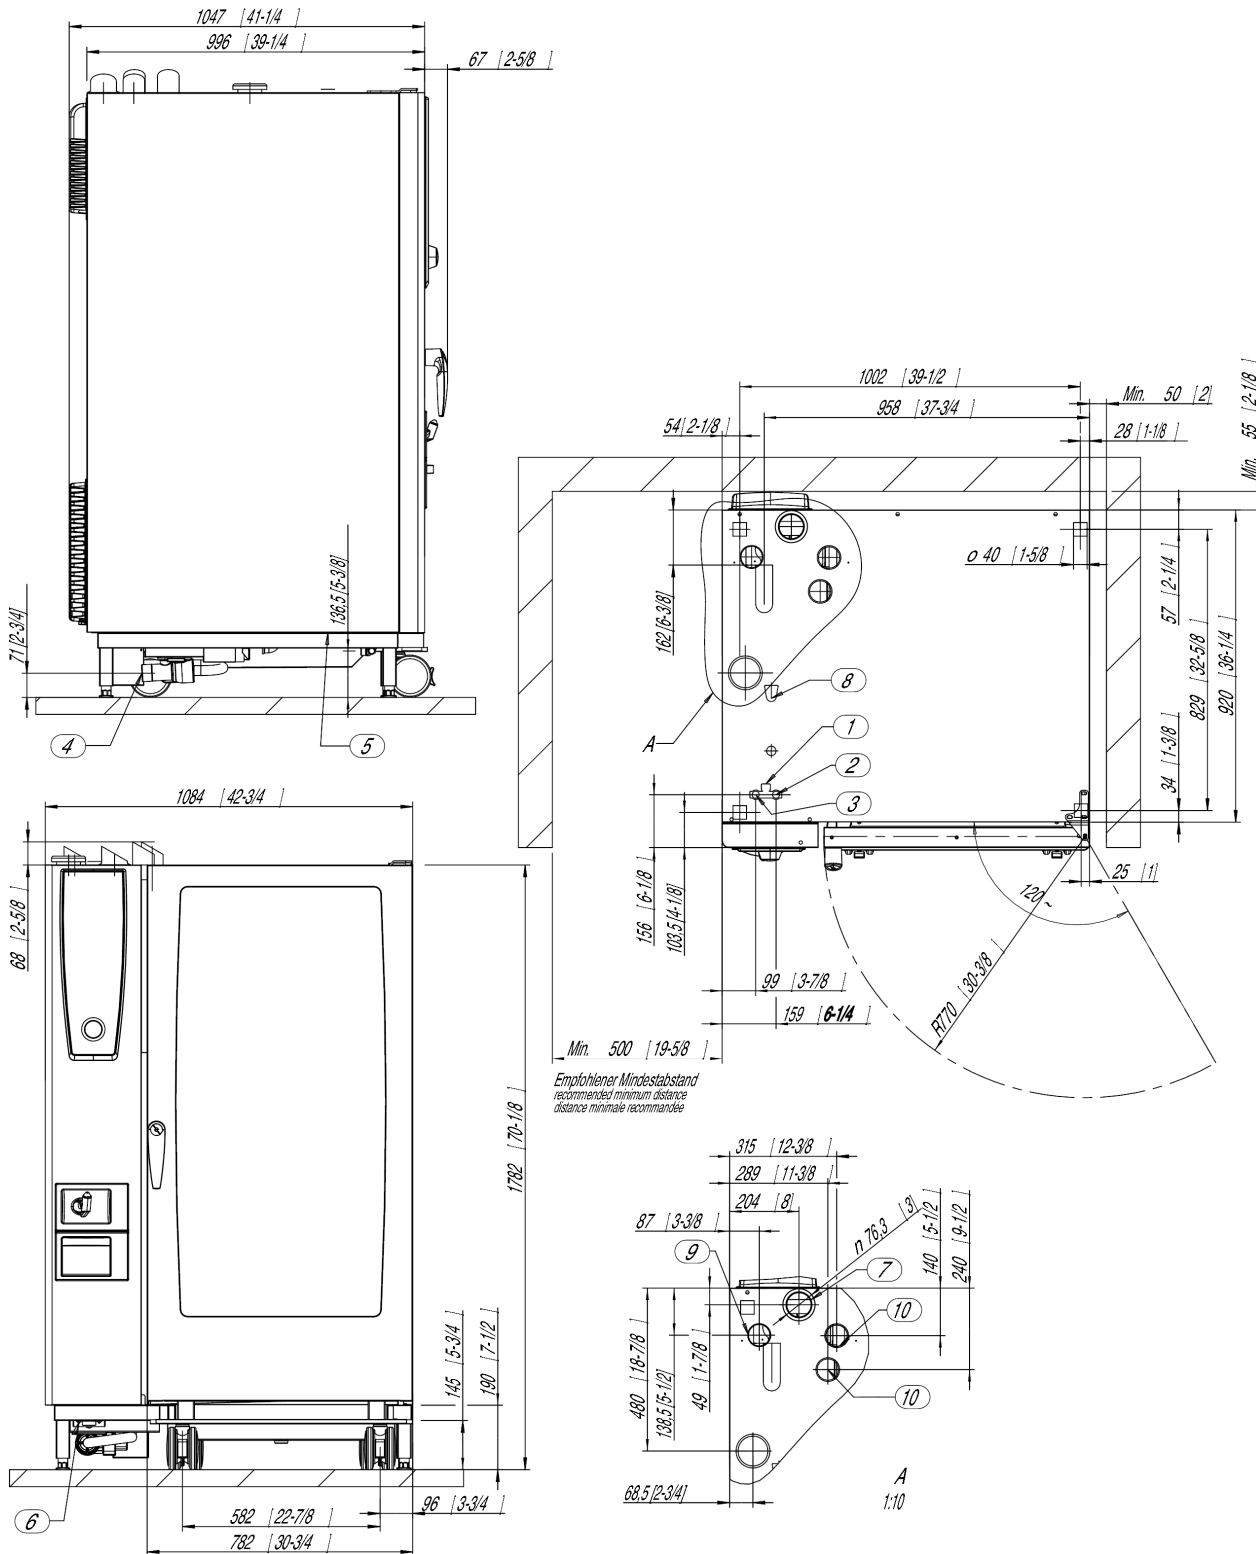

1. Common water supply (cold water) "Single" water connection as shipped
2. Water supply cold water / condensate "Split" water connection
3. Water supply cold / Treated "Split" water connection
4. Water drain
5. Electrical connection wire entrance
6. Chassis Ground connection
7. Steam Vent pipe DN 3" / 78 mm
8. Gas connection 3/4 NPT
9. Steam burner exhaust pipe
10. Hot-air burner exhaust pipe
11. minimum distance 2" / 50 mm
12. Measurements in mm (inch)



Specification

Mon May 15 21:53:01 CEST 2017

CombiMaster® Plus 202 G (20 x 18 x 26 inch/40 x 12 x 20 inch)

GAS OPTIONS

- Natural Gas
- Liquid Gas (LP)

ELECTRICAL CONNECTION ON GAS UNITS (all 60Hz) Special voltages available upon request

Voltage / breaker / running amps /

- 208V 1 Ph / 15 / 7.69 / comes with 6-15P cord and plug -field retrofittable to 240 V
- 240V 1 Ph / 15 / 6.67 / comes with 6-15P cord and plug

ACCESSORIES

- Installation Kits – include electrical, water and drainage connection
 - Gas 208-240 V/60/1 Ph 8720.1561US
- RATIONAL Cleaner Tabs without phosphorous – guarantee maximum cleaning power 56.00.210A
- RATIONAL Rinse Tabs 56.00.211
- Electric descaler pump 60.40.497
- Descaler, 4x 1 gallon case 6006.0110US
- Certified installation by RATIONAL SERVICE-PARTNERS See document
- Preventative Maintenance Kits – door gaskets, air filters, interior light gasket, and light bulbs 87.00.525US
- Mobile oven racks - easier operation of full loads See accessories brochure
- Finishing® plate system – a new dimension to food preparation See accessories brochure
- Heat shield – for installation next to heat source (e.g. range, grill) 60.70.395
- Condensation breaker – to divert steam from the unit into existing hood system 60.72.593
- Ramp - evens out inclines (up to 3%) allowing mobile oven rack to be rolled in smoothly 60.22.181
- Unit height extension – increases the ground clearance by 2 ¾". Must be used with extension (below) 60.70.407
- Mobile oven rack height extension – must be used in conjunction with a unit height extension (above) 60.22.184
- RATIONAL USB data-memory stick – for transferring cooking programs and HACCP data 42.00.162
- For ideal grilling, baking, roasting, frying, rotisserie, steaming, Finishing®, and much more See accessories brochure

FACTORY INSTALLED OPTIONS (special order)

- Ethernet card and port – for easy connection of LAN cable
- Door safety lock – cooking cabinet door is opened by actuating a foot pedal
- Sous-Vide core temperature probe (externally attached)
- Externally attached standard core temperature probe
- Lockable control panel cover
- Control panel protection
- Unit with special hinging racks for bakeries and supermarkets
- Integrated fat drain – any grease runoff is caught in the cabinet and diverted to special grease drip containers
- Security and prison version
- Mobile with castors – special frame with 4 stainless castors and parking brake (not recommended for 3 Ph / 208/240 V)