

ARGB HEAVY DUTY RAISED GRIDDLE BROILERS

STANDARD FEATURES

- Stainless Steel front and sides.
- Heavy gauge steel chassis.
- Compact design for countertop use.
- Highly polished 3/4" thick griddle plate.
- 20,000 BTU radiant style burner with heat deflector, located every 12" of griddle surface.
- Stainless Steel non-clog pilots for instant ignition of each burner.
- Polished glossy black knobs.
- One year limited warranty, parts and labor.

OPTIONAL FEATURES

- 4" adjustable counter legs.
- Stainless Steel equipment stand.






American Range ARGB Series Raised Griddles are design engineered to provide the ultimate in performance and durability. These are ideal for breakfast, bagel snacks and hamburger restaurants. The compact design saves counter space while allowing griddle and broiler operation. The durable chrome plated slide-out rack and full-length removable drip tray are easy to clean. As with all of our heavy duty countertop equipment, they are built to the highest commercial standards to ensure years of trouble free service, featuring superior frame construction and Stainless Steel exterior for easy maintenance.

Combine all of this and our affordable prices and you have the best value for your budget.





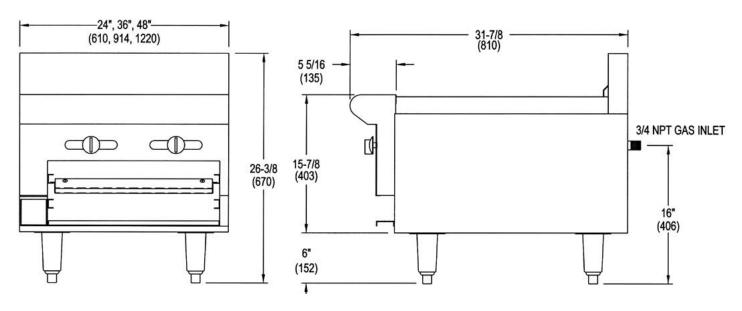

Heavy Duty Thermostatic Griddles: Highly Polished 3/4" thick plates

Model	Width	Depth	Height	Burners	Total BTU	KW	Shipping Weight	Lbs.	Kg.
ARGB-24 ARGB-36 ARGB-48 ARGB-60	24'' 36'' 48'' 60''	32" 32" 32" 32"	16'' 16'' 16''	2 3 4 5	40,000 60,000 80,000 100,000	11 17 23 29		330 430 500 750	149 195 290 371

STANDARD FEATURES

- Stainless Steel front and sides.
- Heavy gauge construction.
- Compact design for countertop use.
- Highly polished 3/4" (19) griddle plate.
- 20,000 BTU radiant style burner with heat deflector, located every 12" (305) of griddle surface.
- Stainless Steel non-clog pilot tip for instant ignition each burner.
- Polished glossy black knobs.
- One year limited warranty, parts and labor.

OPTIONAL FEATURES

- 4" adjustable counter legs.
- · Stainless Steel equipment stand.

GAS SUPPLY: 3/4" NPT Gas inlet. Manifold pressure is 5.0" W.C. for natural gas or 10.0" W.C. for propane gas. Specify type of gas and altitude if over 2000 feet.

CLEARANCES: For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) on sides, and 4" (102) from rear. Radiant broilers for non-combustible locations only.

American Range is a quality manufacturer of commercial cooking equipment. Because of continuing product improvements these specifications are subject to change without prior notice.



