

PROJECT:	
MODEL #:	
ITEM #:	QTY:
AVAILABLE W/H:	APPROVAL:

## Worktop Refrigerators & Freezers




BLUR28-WT-HC / BLUF28-WT-HC



BLUR36-WT-HC / BLUF36-WT-HC



BLUR48-WT-HC / BLUF48-WT-HC  
BLUR60-WT-HC / BLUF60-WT-HC

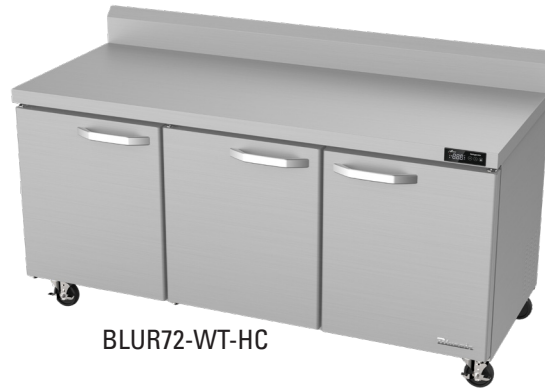

BLUR72-WT-HC

### STANDARD FEATURES

#### Cabinet construction

- Stainless steel cabinet construction  
Stainless steel interior and exterior (galvanized steel back & bottom).
- Cyclopentane Insulation – Contains no hydro-fluorocarbons (HFCs) and is environmentally friendly
- Epoxy coated wire shelves with adjustable shelving height.
- 4 shelves per compartment
- Four (4) 4" diameter swivel casters with front brakes standard.
- 4" back splash guard standard unit

#### Refrigeration

- Hydrocarbon refrigerants (R-290) – increases energy efficiency by up to 25% compared to using HFC refrigerants. It is safer for the environment and does not cause ozone depletion.
- Self-contained system, rear mounted compressor.

- Electrodeposition coated evaporator increases performance by maintaining the heat transfer rates over the life of the evaporator and reducing potential corrosion.
- Innovative hot gas frame heating system reduces condensation and increases energy efficiency.
- Refrigerators have a temperature range between 33°F ~ 39°F
- Freezers hold a temperature range between -10°F ~ 5°F

#### Doors

- Self closing doors
- Durable door gasket with easy replacement.
- Lifetime guaranteed heavy duty all metal door handles. (Ni-Cr Plated)

#### Design

- Self-diagnostic digital temperature control & monitor system

- Digital display allows for easy monitoring  
Digital controls include automatic evaporator fan motor delay.
- Rounded corner design gives a stylish appearance and reduces chances of injury.
- Visual and audible door open alarm, alarm sounds when doors are not completely closed to protect against food spoilage

#### Standard

- NSF/ANSI Standard 7 compliant

#### Connection

- 9 ft long flexible three wire cord with molded plug


#### Optional Features & Accessories

- 2.5" diameter casters available
- 6" adjustable feet available
- Additional shelves are available.


# Worktop Refrigerators & Freezers

## PRODUCT PLAN VIEW

- Top View -

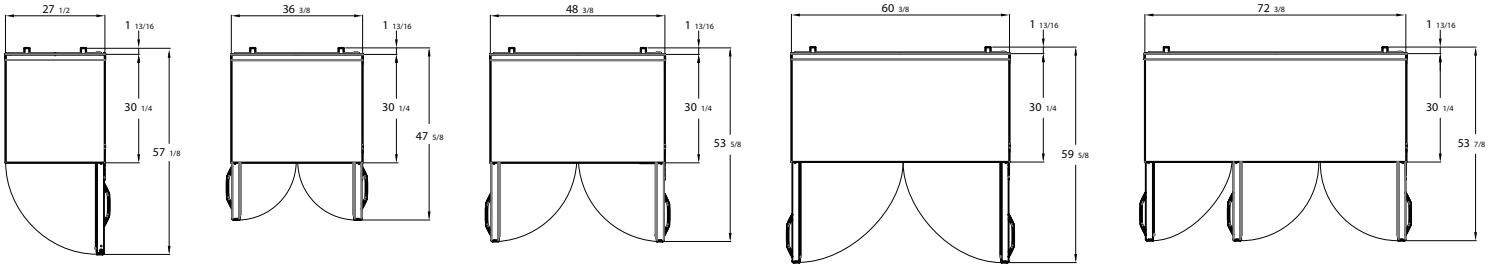

- Front View -

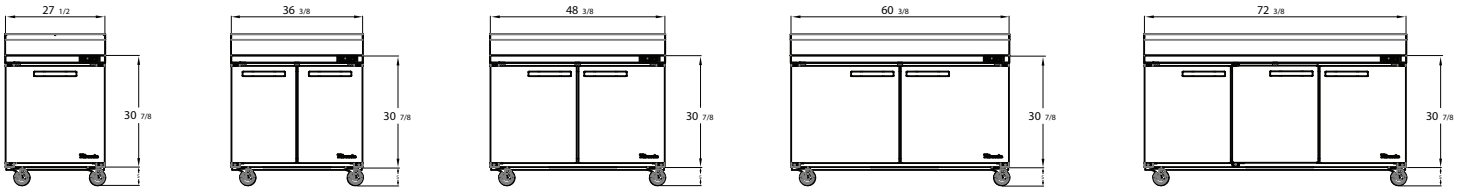

**BLUR28-WT-HC**  
**BLUF28-WT-HC**


**BLUR36-WT-HC**  
**BLUF36-WT-HC**

**BLUR48-WT-HC**  
**BLUF48-WT-HC**

**BLUR60-WT-HC**  
**BLUF60-WT-HC**

**BLUR72-WT-HC**

- Side View -



## PRODUCT SPECIFICATION

Refrigerator

Model	Product Description			Refrigerant	Temperature Range			Easy Maintenance			Cord Length (ft/m)	
	Worktop Refrigerators			R-290	33°F ~ 39°F			Sliding Condensing Unit			9.8ft (3m)	
	Doors	Capacity (Cu.Ft.)	Shelves	Exterior Dimensions (inches / mm)			HP	Voltage	Amps	NEMA config.	Weight (lbs / kg)	
L				D	H	Net Weight					Ship Weight	
BLUR28-WT-HC	1	7	2	27 1/2 (703mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/4	115V / 60Hz	3.6	NEMA 5-15	150 (68)	188 (85)
BLUR36-WT-HC	2	9.5	4	36 3/8 (927mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/4	115V / 60Hz	3.8	NEMA 5-15	180 (82)	223 (101)
BLUR48-WT-HC	2	13.1	4	48 3/8 (1231mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/4	115V / 60Hz	3.9	NEMA 5-15	214 (97)	271 (123)
BLUR60-WT-HC	2	16.7	4	60 3/8 (1537mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/4	115V / 60Hz	4.7	NEMA 5-15	256 (116)	319 (145)
BLUR72-WT-HC	3	20.2	6	72 3/8 (1843mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/4	115V / 60Hz	5.2	NEMA 5-15	298 (135)	372 (169)

Freezer

Model	Product Description			Refrigerant	Temperature Range			Easy Maintenance			Cord Length (ft/m)	
	Worktop Freezers			R-290	-10°F ~ 5°F			Sliding Condensing Unit			9.8ft (3m)	
	Doors	Capacity (Cu.Ft.)	Shelves	Exterior Dimensions (inches / mm)			HP	Voltage	Amps	NEMA config.	Weight (lbs / kg)	
L				D	H	Net Weight					Ship Weight	
BLUF28-WT-HC	1	7	2	27 1/2 (703mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/4	115V / 60Hz	3.2	NEMA 5-15	156 (71)	195 (88)
BLUF36-WT-HC	2	9.5	4	36 3/8 (927mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/2	115V / 60Hz	5.2	NEMA 5-15	189 (86)	232 (105)
BLUF48-WT-HC	2	13.1	4	48 3/8 (1231mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/2	115V / 60Hz	6.0	NEMA 5-15	223 (101)	280 (127)
BLUF60-WT-HC	2	16.7	4	60 3/8 (1537mm)	33 1/32 (838mm)	41 7/8 (1063mm)	1/2	115V / 60Hz	6.2	NEMA 5-15	267 (121)	330 (150)

\*BLUE AIR has the right to change specifications without further notice.