

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

DD Draft Beer Equipment-Direct Draw Dispenser

DD68HC Solid Door Hydrocarbon Series MODELS: DD68HC-1-B DD68HC-1-S



DD68HC-1-S

OPTIONS & ACCESSORIES

- Club top models available
- Custom tower hole location
- Drip tray location option
- Wine models
- Faucet locks
- Glass rinser
- ☐ 3"-6" casters or 6" black legs
- ☐ 1-6 Tap tower
- ☐ 2, 3 & 4 way manifolds
- Remote option

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior black or stainless steel front and door, gray painted sides
- Top and drip tray are heavy-duty stainless steel
- Interior is galvanized steel on walls and ceiling, reinforced floor and doorsills are heavy duty stainless steel
- Full electronic control
- Two (2) draft arms, one (1) with single faucet and one (1) with dual faucets
- 3-in-1 Draft Solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other nonalcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- 3" Stainless steel insulated dispensing tower
- Drain tube located at bottom front of cooler for connection to floor drain
- Self-closing doors with locks
- Magnetic gaskets provide positive door seal
- Compressor available on left or right, specify at time of unit order
- Maintains product temperatures between 36°F and 38°F

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	DD68HC-1-B	DD68HC-1-S
EXTERNAL DIMENSIONAL DATA		
Width Overall	69"	69"
Depth Overall with Handle	29"	29"
Height Overall	52 1/2"	52 1/2"
Number of Doors	2	2
Depth with Door Open 90°	50 1/2"	50 1/2"
Door Opening (in)	21" x 30"	21" x 30"
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	25.93	25.93
Internal Width Overall (in)	56 1/8"	56 1/8"
Internal Depth Overall (in)	23 1/8"	23 1/8"
Internal Height Overall (in)	27 1/4"	27 1/4"
Number of 1/2 Kegs	3	3
ELECTRICAL DATA		
Full Load Amperes 115/60/1	5.5	5.5
REFRIGERATION DATA		
Horsepower	1/3	1/3
Capacity (BTU/Hr)*	2392	2392
WEIGHT DATA		
Gross Weight (Crated lbs)	380 lbs	379 lbs
Height - Crated	45"	41 1/4"
Width - Crated	72"	72"
Depth - Crated	32"	31 1/4"

DD58/68/72 KEG CAPACITY:




3 Std. ½ Keg

3 Std. ½ Keg 2 X 1/6 Keg

3 Std. ½ Keg 1 X ¼ Slim Keg 1 X 1/6 Keg

Bar Equipment-Direct Draw Dispenser Solid Door

Models: DD68HC-1-B, DD68HC-1-S

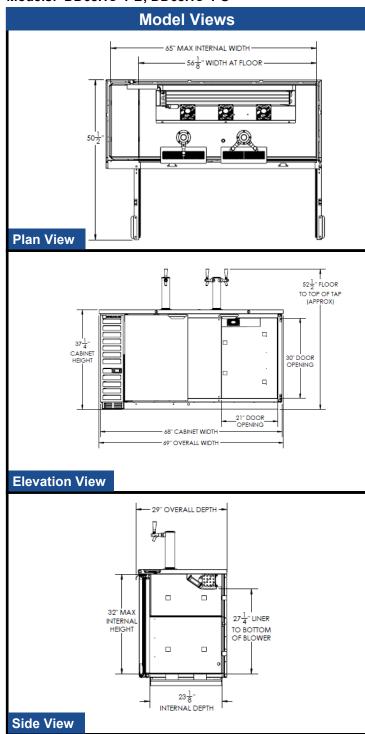

ELECTRICAL CONNECTION



115/60/1 NEMA-5-15P

Units pre-wired at factory and include 8' long cord and plug set.













