B	EVERAGE-AIR
---	-------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

GF BAR EQUIPMENT

GF48L Glass and Plate Froster

MODEL: GF48L-B GF48L-S



GF48L-B



GF48L-S

OPTIONS & ACCESSORIES

- ☐ Stainless steel interior
- Locks
- 3" 6" Casters
- 6" Adjustable legs with plate
- Horizontal mount thermometer
- Dial thermometer
- Remote option

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is available in wear resistant vinyl on steel in black Finish or stainless steel finish
- Standard interior construction utilizes galvanized steel
- Top includes easy glide, stainless steel lids and stainless steel counter top with edge
- Full electronic control
- Four (4) shelves and (2) two bottom racks standard
- Two (2) shelf ledges standard with three (3) mounting points
- Chills glasses and plates at -10°F
- Flexibility in design provides for plate storage and chilling
- Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing is needed

REFRIGERATION SYSTEM

- Refrigeration system uses R404A refrigerant to comply with all environmental concerns
- Automatic, electric defrost
- Epoxy coated evaporator coil


















MODEL	GF48L-B	GF48L-S	
EXTERNAL DIMENSIONAL DATA			
Width Overall	48"	48"	
Depth Overall	26 1/8"	26 1/8"	
Height Overall	33 5/8"	33 5/8"	
Number or Lids	2	2	
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	8.13	8.13	
Internal Width Overall (in)	44"	44"	
Internal Depth Overall (in)	22"	22"	
Internal Depth Useable (in)	17 1/2"	17 1/2"	
Internal Height Overall (in)	18 1/4"	18 1/4"	
Number of Dividers	4	4	
Number of 12 oz. Mugs	164	164	
Number of 8" Plates	250	250	
ELECTRICAL DATA			
Full Load Amperes 115/60/1	7.5	7.5	
REFRIGERATION DATA			
Horsepower	1/2	1/2	
Capacity (BTU/Hr)*	1132	1131	
WEIGHT DATA			
Gross Weight (Crated lbs)	292 lbs	292 lbs	
Height - Crated	39"	39"	
Width - Crated	51 1/2"	51 1/2"	
Depth - Crated	29"	29"	

Bar Equipment - Glass Frosters

Models: GF48L-B, GF48L-S

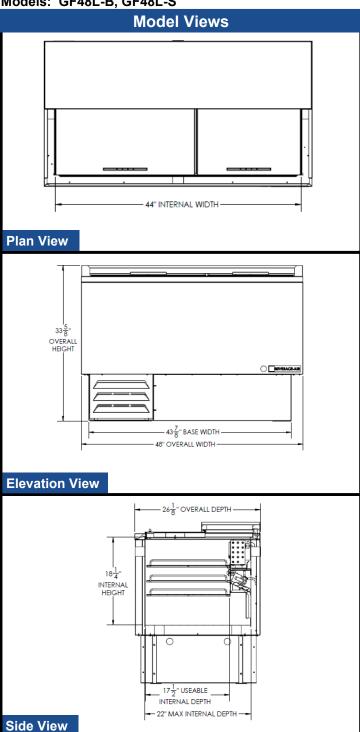

ELECTRICAL CONNECTION

















Units pre-wired at factory and include 8' long cord and plug set.



