



# **MODELS**

KGV-MR-(2, 3, 4, 5, 6)-S

HIGH VOLUME GRAB-N-GO CASE

CASE HOLDS 33°F TO 40°F • FORCED AIR REFRIGERATION • SELF-CONTAINED FRONT & REAR LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES CASES CAN BE MULTIPLEXED













SELF CONTAINED	Model	Number of doors	O.A. Length (inches)	Volume FT <sup>3</sup>	Electrical 115 Volts				Weight lbs		Crate Size (inches)		
				Front	Compressor		LIGHTS		No	With			
					H.P	F.L.A	Fans HTRS	Total Amps	Crate	Crate	L"	W"	H″
	KGV-MR-2-S	2 x 23-1/2	51.5	37.63	5/8	8.9	3.51	12.41	704	864	54	37	95
	KGV-MR-3-S	3 x 23-1/2	75.4	56.37	5/8	8.9	4.35	13.25	964	1204	78	37	95
	KGV-MR-4-S	4 x 23-1/2	99.4	75.26	2 x 5/8	2 x 8.9	3.5 + 3.5	12.4 + 12.4	1408	1724	104	36	95
	KGV-MR-5-S	5 x 23-1/2	123.2	94	2 x 5/8	2 x 8.9	3.5 + 4.4	12.4 +13.3	1668	2008	126	36	95
	KGV-MR-6-S	6 x 23-1/2	147	112.73	2 x 5/8	2 x 8.9	4.4 + 4.4	13.3 +13.3	1928	2408	150	36	95

<sup>\*</sup> Note for other lengths, please contact MVP

## **STANDARD FEATURES**


Back doors for rear loading
Silver colored PVC coated steel front panel
CFC free injected foam insulation
PVC coated steel gray interior
Black steel kick plate
Foamed polystyrene black end panels
Height adjustable shelves can be tilted
Product stops on all shelves
Temperature and defrost regulated by a digital controller
Levelling feet

## **OPTIONAL FEATURES**

Other colors available
Stainless steel exterior and / or interior
Additional shelves
Price tag molding
Product dividers
Joining Kit
Partition

## **WARRANTY**

One year parts and labor with an additional four years on the compressor (part only)

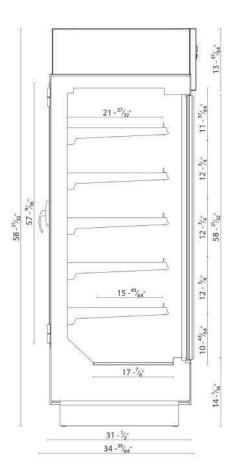

#### NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-7/8" each. Ventilation grills at front and back cannot be blocked. Floor drain must be provided. Cases must be hard wired – no plugs.



