

MAXX COLD

Maxx Cold | The Legacy Companies
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

**LIMITED STOCK
 CALL FOR DETAILS**

International Model:
 Add -50 (220V/50Hz/1Ph)

KEG COOLERS WITH TOWER

Model: MCB24-1B MCB60-2B MCB70-2B MCB90-2B



Maxx Cold Keg Coolers with direct draw beer towers feature a sanitary stainless steel top and black coated steel exterior for durability and easy cleaning. Forced air cooling distributes air evenly to keep contents of the cabinet cooled at the optimum temperature. Standard 3-inch polished stainless steel draft tower dispensers are attached to the top center of the stainless steel counter and cooled by continuous cold air circulation through the channel air distributor system. This reduces foam when dispensing beer. Includes easy-to-access refrigerated storage area for glasses and mugs.

FEATURES

- Easy to grip recessed door handles
- Four (4) 5" casters standard
- Locking doors
- Available in 115V/60Hz, 220V/60Hz & 230V/60Hz

TEMPERATURE

- Holding temperature: 33° to 41°F (1° to 5°C)
- Utilizes environmentally friendly refrigerant R134A

CONSTRUCTION

- Painted black coated steel exterior
- Galvanized steel interior
- Stainless steel interior floor
- Stainless steel top
- CFC-free Polyurethane insulated walls and doors
- Slide out condensing unit for easy cleaning and servicing
- Epoxy coated evaporator coils to resist corrosion

REFRIGERANT

Environmentally friendly and CFC-free R134A

ELECTRIC

115/60Hz/1 Ph (NEMA 5-15)

Cord set includes plug & 9.8' (3m) cord

220V/60Hz & 230V/60Hz available as options

1.27" / 32 mm



NEMA 5-15P



Certified to
ANSI-NSF 7



Certified to
ANSI UL 471

Maxx Cold WARRANTY (USA / CANADA)

Three (3) years parts and on-site labor

Five additional (5) years compressor (part only)

Administered by The Legacy Companies, 877.368.2797




24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

6/26/18 D

KEG COOLERS WITH TOWER

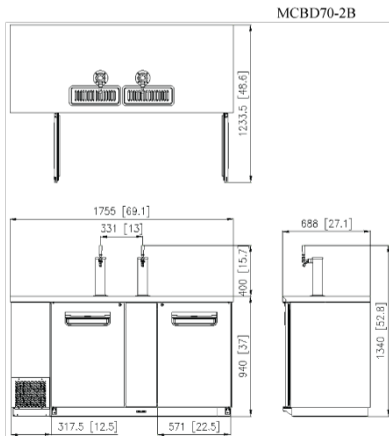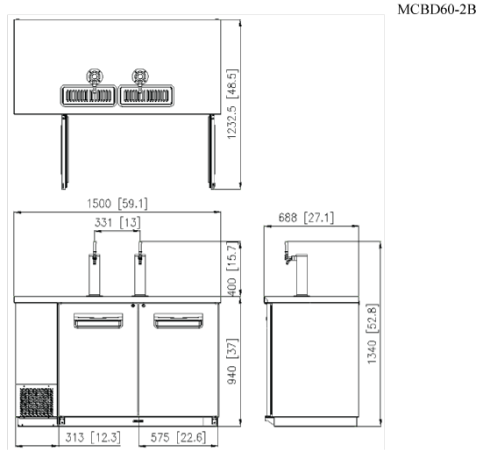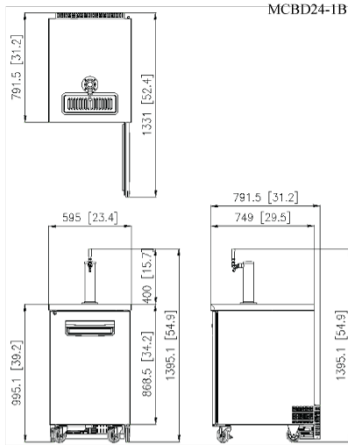

	Dimensions* in / mm	Capacity	Temperature Range	Voltage	Amps	Unit Weight	HP
MCB24-1B	23.4 x 31.2 x 54.9 595 x 792 x 1395	7 Cu Ft 198 L	33° - 41°F 1° - 5° C	115V/60Hz/1	3.3	187 lb 85 kg	1/5
MCB60-2B	59.1 x 27.1 x 52.8 1500 x 688 x 1340	19 Cu Ft 538 L	33° - 41°F 1° - 5° C	115V/60Hz/1	6.3	276 lb 125 kg	3/8
MCB70-2B	69.1 x 27.1 x 52.8 1755 x 688 x 1340	23 Cu Ft 651 L	33° - 41°F 1° - 5° C	115V/60Hz/1	6.3	298 lb 135 kg	3/8
MCB90-2B (Discontinued)	90.4 x 27.1 x 52.8 2295 x 688 x 1340	31.5 Cu Ft 892 L	33° - 41°F 1° - 5° C	115V/60Hz/1	6.3	441 lb 200 kg	3/8

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.
 While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.
 By using the information provided, the user assumes all risks in connection with such use.