



Maxx Cold X-series | The Legacy Companies
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: _____
 Location: _____
 Item #: _____ Qty: _____
 Model: _____

REACH-IN FREEZERS

Model: MXCF23FD MXCF49FD MXCF72FD

International Model: Add -50 (230V/50Hz/1Ph)
 or -60 (230V/60Hz/1Ph)



MXCF23FD



MXCF49FD



MXCF72FD

Maxx Cold Reach-In Freezers keep frequently accessed ingredients within reach and at proper storage temperatures. Capacity options range from 23 to 72 cubic feet. Choose from single or multi-door models to accommodate your volume requirements. Each reach-in freezer is constructed from stainless steel and has features that are meant to meet high-demand applications, including an oversized refrigeration system, door operated interior lighting and self closing doors.

FEATURES

- Top-Mounted condenser
- Oversized evaporator and condenser refrigeration system for quick cooling and greater efficiency
- Self-contained, energy efficient refrigeration system
- Automatic defrost system
- Recessed handles
- Automatic interior lighting
- Open door alert, beeps when door has been open for 3 minutes
- Hinged, self closing doors
- Door Locks
- 4" diameter swivel casters (2 lock in place – shorter casters are an option)
- Integral condensate evaporator eliminates need for a floor drain connection

TEMPERATURE

- Holding temperature: -10° to 10°F (-23° to -12°C)
- Digitally controlled system maintains optimum temperature
- LED display on outside is easily viewed up to 15 feet.

CONSTRUCTION

- Exterior Material: Stainless Steel
- Interior Material: White, Painted Aluminum
- Comes with 6' NEMA 5-15 (23FD/49FD) or L14-20 (72FD) Cord Set
- Shelving: Heavy duty PE coated wire shelves.
 - MXCF23 Three (3) Shelves
 - MXCF49 Six (6) Shelves – 3 per door section.
 - MXCF72 Nine (9) Shelves – 3 per door section.

REFRIGERANT

- CFC & HCFC free R-404A

MXCF23FD/49FD MXCF72FD



NEMA 5-15



NEMA L14-20

ELECTRIC

MXCF23FD/49FD: 120V/60Hz/1 Ph (NEMA 5-15P)

- * Plugs into conventional 115V wall outlet

Circuit requires appropriate overload protection of 15 amp breaker or fuse

MXCF72FD: 208-230V/60Hz/1 Ph (NEMA L14-20)

- * Requires a 20 amp breaker, designated circuit



Certified to
ANSI-NSF 7



Certified to
ANSI UL 471



DOE 2017
Compliant

Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts
 One (1) year on-site labor
 Four (4) years compressor (part only)
 Administered by The Legacy Companies, 877.368.2797


Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Cold Product will deliver years of trouble free, reliable, low maintenance, efficient operation.



Maxx Cold X-series | The Legacy Companies
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401
 www.MaximumFoodService.com • Info@MaxxColdFoodService.com


REACH-IN FREEZERS

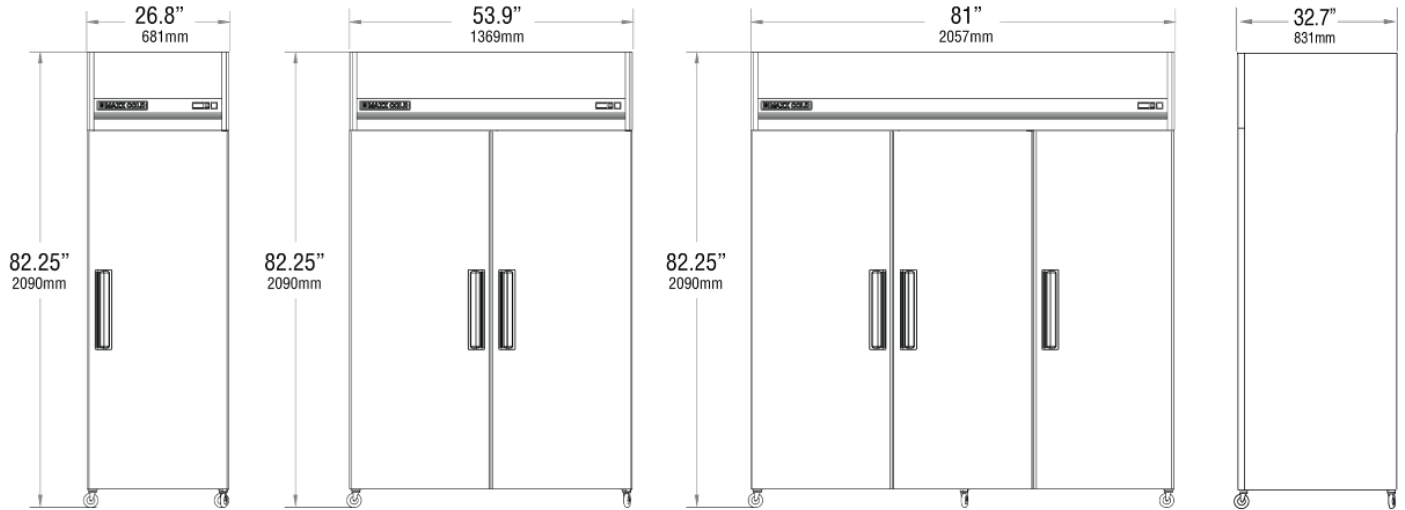

MXCF23FD

MXCF49FD

MXCF72FD

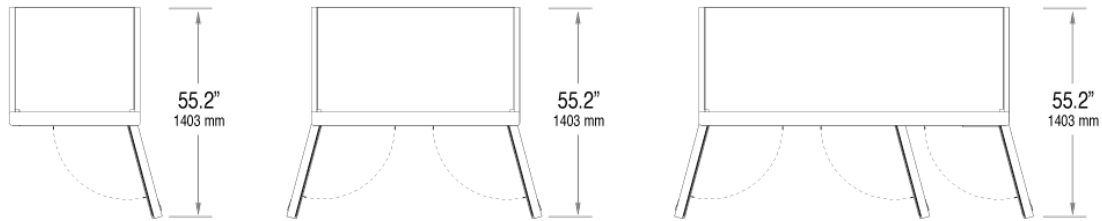

	MXCF23FD	MXCF49FD	MXCF72FD
	** Dimensions include Standard Caster Height**		
In: External Dimensions W x D x H	26.8 x 32.7 x 82.25	53.9 x 32.7 x 82.25	81 x 32.7 x 82.25
mm: External Dimensions W x D x H	681 x 831 x 2090	1369 x 831 x 2090	2057 x 831 x 2090
Capacity	23 Cu Ft / 651 L	49 Cu Ft / 1,387 L	72 Cu Ft / 2,039 L
Hinged Doors	1	2	3
Shelves	3	6	9
Amps (Watts)	11 (1320)	12 (1380)	8.8 (2025)
Electrical Service	115V/60Hz/1Ph	115V/60Hz/1Ph	230V/60Hz/1Ph
Provided NEMA Cord Set	5-15	5-15	L14-20
Unit Weight	305 lb / 138 kg	468 lb / 212 kg	563 lb / 255 kg
Shipping Weight	336 lb / 153 kg	502 lb / 228 kg	601 lb / 273 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.