



Maxx Cold X-series | The Legacy Companies  
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401  
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

# REACH-IN REFRIGERATORS

Model:  MXCR23FD  MXCR49FD  MXCR72FD

International Model: Add -50 (230V/50Hz/1Ph)  
 or -60 (230V/60Hz/1Ph)



MXCR23FD



MXCR49FD



MXCR72FD

Maxx Cold Reach-In Refrigerators keep frequently accessed ingredients within reach and at proper storage temperatures. Capacity options range from 23 to 72 cubic feet. Choose from single or multi-door models to accommodate your volume requirements. Each reach-in refrigerator is constructed from stainless steel and has features that are meant to meet high-demand applications, including an oversized refrigeration system, door operated interior lighting and self closing doors.

## FEATURES

- Top-Mounted condenser
- Oversized evaporator and condenser refrigeration system for quick cooling and greater efficiency
- Self-contained, energy efficient refrigeration system
- Automatic defrost system
- Recessed handles
- Automatic interior lighting
- Open door alert, beeps when door has been open for 3 minutes
- Hinged, self closing doors
- Door Locks
- 4" diameter swivel casters (2 lock in place – shorter casters are an option)
- Integral condensate evaporator eliminates need for a floor drain connection

## TEMPERATURE

- Holding temperature: 33° to 41°F (1° to 5°C)
- Digitally controlled system maintains optimum temperature
- LED display on outside is easily viewed up to 15 feet.

## CONSTRUCTION

- Exterior Material: Stainless Steel
- Interior Material: White, Painted Aluminum
- Comes with 6' NEMA 5-15 Cord Set
- Shelving: Heavy duty PE coated wire shelves.
  - MXCR23 Three (3) Shelves
  - MXCR49 Six (6) Shelves – 3 per door section.
  - MXCR72 Nine (9) Shelves – 3 per door section.

## REFRIGERANT


- CFC & HCFC free R-134A

## ELECTRIC

120V/60Hz/1 Ph (NEMA 5-15P)

\* Plugs into conventional 115V wall outlet

Circuit requires appropriate overload protection of 15 amp breaker or fuse



Certified to ANSI-NSF 7



Certified to ANSI UL 471



DOE 2017 Compliant

## Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts  
 One (1) year on-site labor  
 Four (4) years compressor (part only)  
 Administered by The Legacy Companies, 877.368.2797


Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Cold Product will deliver years of trouble free, reliable, low maintenance, efficient operation.



Maxx Cold X-series | The Legacy Companies  
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401  
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com


# REACH-IN REFRIGERATORS

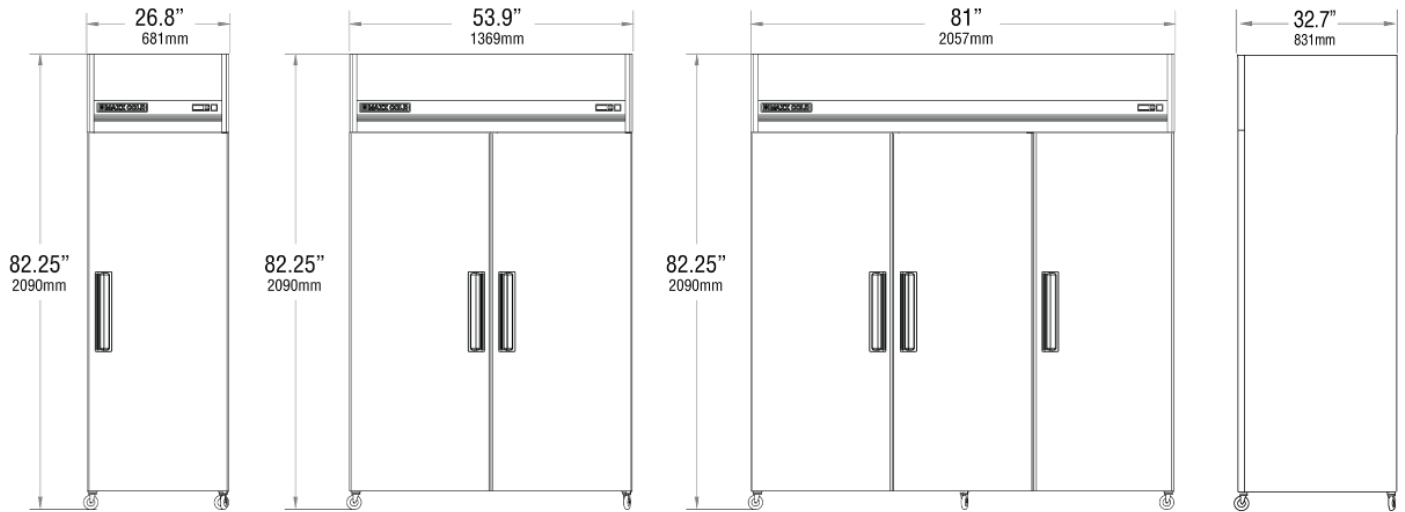

MXCR23FD

MXCR49FD

MXCR72FD

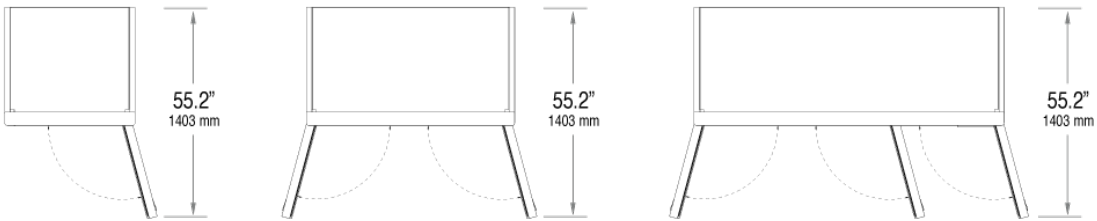

	MXCR23FD	MXCR49FD	MXCR72FD
	** Dimensions include Standard Caster Height**		
<b>In: External Dimensions W x D x H</b>	26.8 x 32.7 x 82.25	53.9 x 32.7 x 82.25	81 x 32.7 x 82.25
<b>mm: External Dimensions W x D x H</b>	681 x 831 x 2090	1369 x 831 x 2090	2057 x 831 x 2090
<b>Capacity</b>	23 Cu Ft / 651 L	49 Cu Ft / 1,387 L	72 Cu Ft / 2,039 L
<b>Hinged Doors</b>	1	2	3
<b>Shelves</b>	3	6	9
<b>Amps (Watts)</b>	6	9	10
<b>Electrical Service</b>	115V/60Hz/1Ph	115V/60Hz/1Ph	115V/60Hz/1Ph
<b>Provided NEMA Cord Set</b>	5-15	5-15	5-15
<b>Unit Weight</b>	282 lb / 128 kg	447 lb / 207 kg	468 lb / 212 kg
<b>Shipping Weight</b>	311 lb / 143 kg	536 lb / 244 kg	639 lb / 291 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.