

Project Name:	
Location:	
Item:	Qty.:
Model:	

Undercounter Refrigerator/Freezer

- ▶ MXCR27U
- ▶ MXCF27U
- ▶ MXCR48U
- ▶ MXCF48U
- ▶ MXCR60U
- ▶ MXCF60U



Model MXCR27U/MXCF27U



Model MXCR48U/MXCF48U



Model MXCR60U/MXCF60U

FEATURES


- Stainless steel exterior and coated aluminum interior
- Urethane insulated walls and doors
- Recessed Door Handles
- Adjustable, heavy duty epoxy coated shelves, two per section
- Four casters (2 locking, 2 non-locking)
- Under Counter series Features an easily serviced back mounted compressor
- Utilizes enviromentally friendly refrigerants using R134A for refrigerators and R404A for freezers
- Forced-air refrigeration
- Efficient cooling system (two or more fans)
- Self-contained
- Automatic defrost system
- NEMA 5-15P plug
- Temperature range:
Refrigerator 28°F to 39°F
Freezer -5°F to +5°F




Specifications subject to change without notice.

Approvals:


Undercounter Refrigerator/Freezer

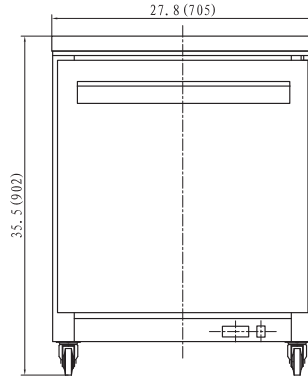

Model MXCR27U/MXCF27U

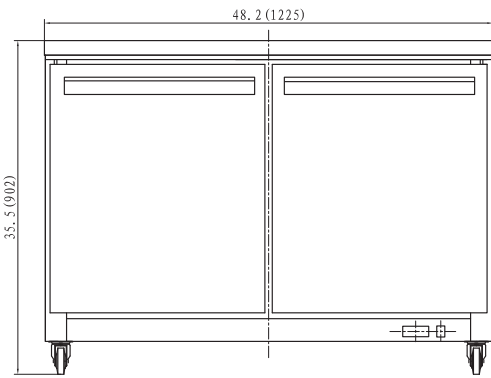

Model MXCR48U/MXCF48U

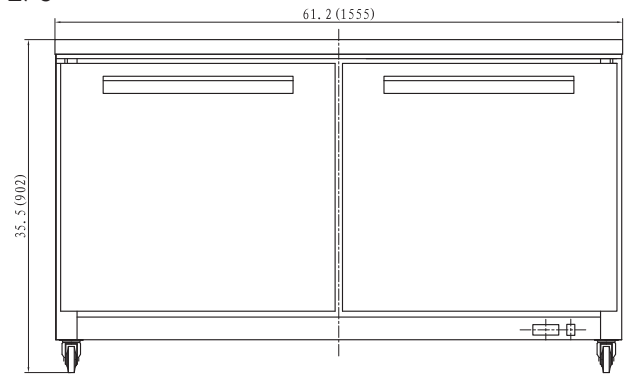

Model MXCR60U/MXCF60U

Dimensional Data

Model	Dim (WxDxH")	Capacity	Hp	Temp	Weight	Doors	Watts	NEMA Plug (115/60/1 Only)
MXCR27U	28 x 30 x 32.5 (705x760x822mm)	6.5 Cu Ft	3/8	32° to 45°	243LB 110 KG	1	748	5-15P
MXCF27U	28 x 30 x 32.5 (705x760x822mm)	6.5 Cu Ft	1/2	-5° to +5°	243LB 110 KG	1	805	5-15P
MXCR48U	48 x 30 x 32.5 (1225x760x822 mm)	12 Cu Ft	3/8	28° to 39°	300 LB 136 KG	2	748	5-15P
MXCF48U	48 x 30 x 32.5 (1225x760x822 mm)	12 Cu Ft	1/2	-5° to +5°	300 LB 136 KG	2	1035	5-15P
MXCR60U	61 x 30 x 32.5 (1555x760x822 mm)	15.5 Cu Ft	3/8	28° to 39°	348 LB 158 KG	2	748	5-15P
MXCF60U	61 x 30 x 32.5 (1555x760x822 mm)	15.5 Cu Ft	5/8	-5° to +5°	348 LB 158 KG	2	1150	5-15P