

| Project: | AIA# |
|-----------|------|
| Item: | |
| Location: | SIS# |
| Approved: | |

P-SERIES TOP MOUNT ROLL-IN FREEZER

PFI2HC Solid Door Freezer Hydrocarbon Series

MODEL: PFI2HC-1AS





- Stainless steel front and side exterior (galvanized rear, back &
- · Interior is made of corrosion resistant aluminum
- · Stainless steel door liner
- · Full electronic control
- Expansion valve technology
- Variable speed compressor technology
- Self-closing door with 120° stay-open feature
- · 22 Gauge stainless steel doors
- · LED interior light
- · Heavy-duty cylinder locks
- Snap-in magnetic gaskets for positive door seal
- · Hinged front shroud
- · Reinforced stainless steel door ramps outside and cart guides
- Accepts carts up to 26"(W) x 26"(D) x 64 1/2"(H) (cart not included)
- · Wiper gasket at bottom of door seals door to ramp
- Energy saving thermal breaker
- · Stainless steel breaker caps
- 8' Cord and plug (see electrical data for details)

OPTIONS & ACCESSORIES

- · Stainless steel interior
- Door swing orientation (at time of order)

REFRIGERATION SYSTEM

- · Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- · Adaptive defrost
- Epoxy coated evaporator coil, located out of the food zone
- Freezer capable of maintaining product temperature down to -10°F
















| MODEL | PFI2HC-1AS |
|------------------------------|-------------------|
| EXTERNAL DIMENSIONAL DATA | |
| Width Overall | 68 ½" |
| Depth Overall with Handle | 36 1/4" |
| Height Overall | 84 ¾" |
| Between Cart Guides | 26" |
| Number of Doors | 2 |
| Depth with Door Open 90° | 65 ¾" |
| Door Opening (in) | 27 1/8" x 65 1/2" |
| INTERNAL DIMENSIONAL DATA | |
| NET Capacity (cubic ft.) | 70.09 |
| Internal Width Overall (in) | 63 %" |
| Internal Depth Overall (in) | 26" |
| Internal Height Overall (in) | 66 1/4" |
| ELECTRICAL DATA | |
| Full Load Amperes 115/60/1* | 13.9 |
| REFRIGERATION DATA | |
| Horsepower | (2) 3/4 |
| Capacity (BTU/Hr) | 4900 |
| Heat Rejection (BTU/Hr) | 7350 |
| Charge (lbs/grams) | 0.2866/130 |
| SHIPPING DATA | |
| Gross Weight - Crated | 610 lbs |
| Height - Crated | 88" |
| Width - Crated | 78" |
| Depth - Crated | 45" |

Top Mount Roll-in Freezer Model: PFI2HC-1AS

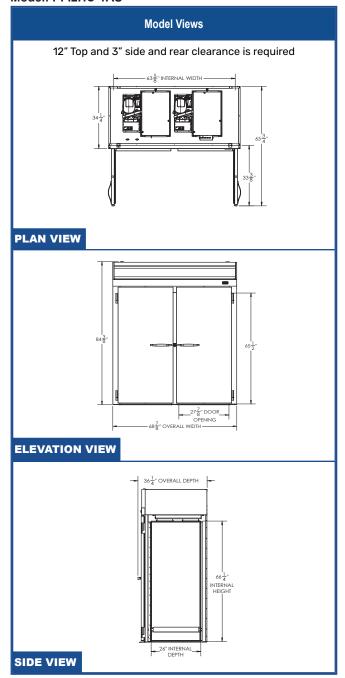

ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord and plug

 * NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage-Air recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.













