

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

# Roll-Thru Glass door Heated Cabinet

Roll-Thru PRO Series

## \_\_\_ FEATURES & BENEFITS =\_\_

# Model: PRO-26H-G-RT(-L)(-LR)(-RL) PRO-26H2-G-RT(-L)(-LR)(-RL)

#### ■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- · Sensitive touch display.

#### Ducted fan air distribution system

Maintains temperature within the food zone

#### On/Off switch

ON/OFF switch is located on control panel

#### All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

#### High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

- Full length stainless steel solid doors with glass window
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles
- PRO-26H-G-RT: Right hinged, 115V
- PRO-26H-G-RT-L: Left hinged, 115V
- PRO-26H-G-RT-LR: (Front) Left hinged, (Back) Right hinged, 115V
- PRO-26H-G-RT-RL: (Front) Right hinged, (Back) Left hinged, 115V
- PRO-26H2-G-RT: Right hinged, 208V
- PRO-26H2-G-RT-L: Left hinged, 208V
- PRO-26H2-G-RT-LR: (Front) Left hinged, (Back) Right hinged, 208V
- PRO-26H2-G-RT-RL: (Front) Right hinged, (Back) Left hinged, 208V
















(unit: inch)

# Roll-Thru Glass door Heated Cabinet

# Model: PRO-26H-G-RT(-L)(-LR)(-RL) PRO-26H2-G-RT(-L)(-LR)(-RL)

ELECTRICAL DATA	PRO-26H-G-RT (-L)(-LR)(-RL)	PRO-26H2-G-RT (-L)(-LR)(-RL)	
Voltage	115/60/1	208/115/60/1	
Plug Type	NEMA 5-15P	NEMA L14-20P	
Full Load Amperes	13.5	7.5	
Wattage (W)	1550	1550	
Feed Wires with Ground	3	4	
Cord Length (ft.)	8	8	
DIMENSIONAL DATA			
# of Doors	2	2	
# of Racks Accepted	1	1	
Net Capacity (cu. ft.)	38.02	38.02	
Ext. Length Overall (in.)	34 (865mm)	34 (865mm)	
Ext. Depth Overall (in.)*	401/8 (1020mm)	401/8 (1020mm)	
Ext. Height Overall (in.)	841/4 (2140mm)	841/4 (2140mm)	
Int. Length Overall (in.)	275/8 (701mm)	275/8 (701mm)	
Int. Depth Overall (in.)	31 <sub>1/2</sub> (800mm)	311/2 (800mm)	
Int. Height Overall (in.)	667/8 (1699mm)	667/8 (1699mm)	
Rack Size (LxDxH) (in.)	27 x 29 x 66	27 x 29 x 66	
Net Weight (lbs.)	459	459	
Gross Weight (lbs.)	504	504	

Design and specifications subject to change without notice.


Actual shipping weight may differ due to extra packing materials for product protection.

## ■ WARRANTY: 3 Year Parts and Labor Warranty


#### STANDARD FEATURES

- · Door locks standard
- · Solid and sturdy grille design
- · Heavy duty stainless steel ramp standard
- \*\* Lead time applies. Please contact your sales representative for more details to order.

### **PLAN VIEW**



**TOP VIEW** 

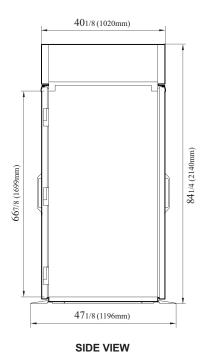

Ver.20210730











■ Turbo Air: 800-627-0032 ■ Warranty: 800-381-7770 ■ **GK**: 800-500-3519 ■ **AC**: 888-900-1002











<sup>\*</sup> Depth does not include 2-1/2" for door handles. Depth does not include 7" for ramps.