

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

Pass Thru Glass Door Heated Cabinet

PRO Series

Pass-Thru



Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarm beeps when doors are not sealed.
- · Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- · Sensitive touch display.
- Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while. PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

LED interior lighting

Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.

- High-density polyurethane insulation The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Full length glass doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles



PRO-50H-G-PT	4	48.7	6	3000	15	550	513/4 x 361/4 x 78
Model	Swing Doors	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	$L \ge D^* \ge H^{\dagger}$ (inches)
							Intertek Intertek

Ver.20210802 Printed in U.S.A.

* Depth does not include 2-1/2" for door handles. † Height does not include 5" for caster height.

Model : PRO-50H-G-PT

Pass Thru Glass Door Heated Cabinet

Pass-Thru PRO Series

Model : PRO-50H-G-PT

ELECTRICAL DATA					
Voltage	208/115/60/1				
Plug Type					
Full Load Amperes	15				
Wattage (W)	3000 4 8				
Feed Wires with Ground					
Cord Length (ft.)					
DIMENSIONAL DATA					
# of Doors	4 2 48.7				
# of Racks Accepted					
Net Capacity (cu. ft.)					
Ext. Length Overall (in.)	513/4 (1314mm)				
Ext. Depth Overall (in.)*	361/4 (920mm)				
Ext. Height Overall (in.) [†]	78 (1982mm)				
Int. Length Overall (in.)	421/4 (1073mm) 275/8(702mm)				
Int. Depth Overall (in.)					
Int. Height Overall (in.)	583/4 (1493mm)				
# of Shelves	6				
Shelf Size (L x D) (in.)	223/4 x 263/8				
Net Weight (lbs.)	492				
Gross Weight (lbs.)	550				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 2-1/2" for door handles.

+ Height does not include 5" for caster height.

WARRANTY : 3 Year Parts and Labor Warranty

STANDARD FEATURES

- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design
- ** Lead time applies. Please contact your sales representative for more details to order.

OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake),
- M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700
- Half door bun tray rack: TSP-2224
- (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250 (each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4),
- TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF

(GERMAN

KNIFE)

• (1) Pair of #1 Tray Slides: H26R104460

lurbo air


• (1) Pair of Universal Tray Slides: H26R104470


Ver.20210802

Intertek Intertek U. S. A

PLAN VIEW

(unit : inch)



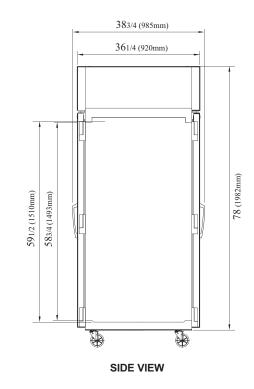

Turbo Air : 800-627-0032 **GK** : 800-500-3519

- Warranty : 800-381-7770 AC : 888-900-1002
- MRADIANCE **Turbo air** Texaking

Continued product development may necessitate specification changes without notice.