

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

# Pass Thru Solid Door Heated Cabinet

Pass-Thru PRO Series

**Model: PRO-50H-PT** 

#### = FEATURES & BENEFITS =

#### ■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- · Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- · Digital display allows for easy monitoring.
- · Sensitive touch display.

#### Ducted fan air distribution system

Maintains temperature within the food zone

#### On/Off switch

ON/OFF switch is located on control panel

#### All stainless steel cabinet construction

The PRO series model boasts a stainless steel interior and a 22 gauge stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

#### Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

#### ■ LED interior lighting

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime guaranteed heavy duty hinges and handles











ENERGY STAR® Qualified

Model	Swing Door	CU./FT.	#of Shelves	Wattage (W)	AMPS	Crated Weight (lbs.)	L x D*x H† (inches)
PRO-50H-PT	4	48.7	6	3000	15	510	513/4 x 361/4 x 78

(unit: inch)

# Pass Thru Solid Door Heated Cabinet

### Model: PRO-50H-PT

ELECTRICAL DATA				
Voltage	208/115/60/1			
Plug Type	NEMA L14-20P			
Full Load Amperes	15			
Wattage (W)	3000			
Feed Wires with Ground	4			
Cord Length (ft.)	8			
DIMENSIONAL DATA				
# of Doors	4			
# of Racks Accepted	2			
Net Capacity (cu. ft.)	48.7			
Ext. Length Overall (in.)	513/4 (1314mm)			
Ext. Depth Overall (in.)*	361/4 (920mm)			
Ext. Height Overall (in.)†	78 (1982mm)			
Int. Length Overall (in.)	421/4 (1073mm)			
Int. Depth Overall (in.)	275/8(702mm)			
Int. Height Overall (in.)	583/4 (1493mm)			
# of Shelves	6			
Shelf Size (L x D) (in.)	223/4 x 263/8			
Net Weight (lbs.)	452			
Gross Weight (lbs.)	510			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

#### ■ WARRANTY: 3 Year Parts and Labor Warranty


#### STANDARD FEATURES


- · Door locks standard
- · Standard 4" dia. swivel casters with locks on the front set
- · Easy replaceable one piece magnetic door gaskets
- · Solid and sturdy grille design
- \*\* Lead time applies. Please contact your sales representative for more details to order.

#### OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700
- · Half door bun tray rack: TSP-2224
- (each holds up to six 18"L x 26"D sheet pans)
- Full door bun tray rack: TSP-2250
- (each holds up to fifteen 18"L x 26"D sheet pans)
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4), TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470

### **PLAN VIEW**

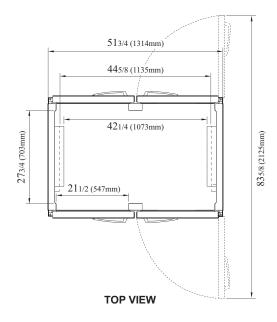

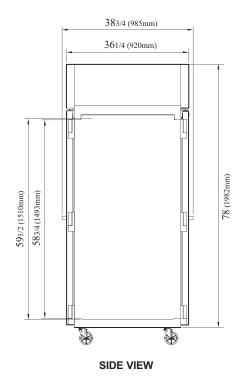

Ver 20210729











**ENERGY STAR®** Qualified







■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519

■ Warranty: 800-381-7770 ■ AC: 888-900-1002

<sup>\*</sup> Depth does not include 2-1/2" for door handles.

<sup>†</sup> Height does not include 5" for caster height.