

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

| | |
|-------------------|--------|
| Project: | |
| Model #: | |
| Item #: | |
| Available W/H: | Qty: |
| Approval: | |
| AIA #: | SIS #: |
| CSI Section 11400 | |

Half Solid Door Heated Cabinet

Reach-In
PRO Series

Model : PRO-77-6H

FEATURES & BENEFITS

- **Digital temperature control & monitor system**
 - Keep food products safe by maintaining constant temperatures.
 - Alarm beeps when doors are not sealed.
 - Early warning alarm program detects issues before malfunction occurs.
 - Digital display allows for easy monitoring.
 - Sensitive touch display.
- **Ducted fan air distribution system**
 Maintains temperature within the food zone
- **On/Off switch**
 ON/OFF switch is located on control panel
- **All stainless steel cabinet construction**
 The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
- **Sturdy, clean stainless steel shelving**
 Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.
- **LED interior lighting**
- **High-density polyurethane insulation**
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- **Half length stainless steel solid doors with locks**
- **Self-closing doors with stay open feature at 120 degrees**
- **Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
- **Lifetime guaranteed heavy duty hinges and handles**




| Model | Swing Door | CU./FT. | #of Shelves | Wattage (W) | AMPS | Crated Weight (lbs.) | L x D x H [†] (inches) |
|------------------|------------|-------------|-------------|-------------|-----------|----------------------|---|
| PRO-77-6H | 6 | 73.9 | 9 | 3000 | 15 | 786 | 77³/₄ x 33⁷/₈ x 78 |

Half Solid Door Heated Cabinet

Reach-In
PRO Series

Model : PRO-77-6H

| ELECTRICAL DATA | |
|----------------------------|--|
| Voltage | 208/115/60/1 |
| Plug Type |  NEMA L14-20P |
| Full Load Amperes | 15 |
| Wattage (W) | 3000 |
| Feed Wires with Ground | 4 |
| Cord Length (ft.) | 8 |
| DIMENSIONAL DATA | |
| # of Doors | 6 |
| # of Racks Accepted | 3 |
| Net Capacity (cu. ft.) | 73.9 |
| Ext. Length Overall (in.) | 77 ³ / ₄ (1976mm) |
| Ext. Depth Overall (in.)* | 33 ⁷ / ₈ (860mm) |
| Ext. Height Overall (in.)† | 78 (1982mm) |
| Int. Length Overall (in.) | 68 ¹ / ₄ (1735mm) |
| Int. Depth Overall (in.) | 27 ⁵ / ₈ (702mm) |
| Int. Height Overall (in.) | 58 ³ / ₄ (1493mm) |
| # of Shelves | 9 |
| Shelf Size (L x D) (in.) | 22 ³ / ₄ x 26 ³ / ₈ (Left/Right) |
| | 25 x 26 ³ / ₈ (Middle) |
| Net Weight (lbs.) | 718 |
| Gross Weight (lbs.) | 786 |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES

- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design

** Lead time applies. Please contact your sales representative for more details to order.


■ OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI:
M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: (L, R) H50R901700, (M) H77R801710
- Half door bun tray rack: TSP-2224
(each holds up to six 18"L x 26"D sheet pans-sold separately)
- Tray slides kits: TS23-N1LR(#1), TS23-N1LR HALF, TS23-N4LR(#4),
TS23-N4LR HALF, TS23-UNLR-H(Universal), TS23-UNLR-H HALF,
TS3-N1C(#1), TS3-N1C HALF, TS3-N4C(#4), TS3-N4C HALF,
TS3-UNC-H(Universal), TS3-UNC-H HALF
- (1) Pair of #1 Tray Slides: H26R104460
- (1) Pair of Universal Tray Slides: H26R104470


Ver.20210729

PLAN VIEW

(unit : inch)

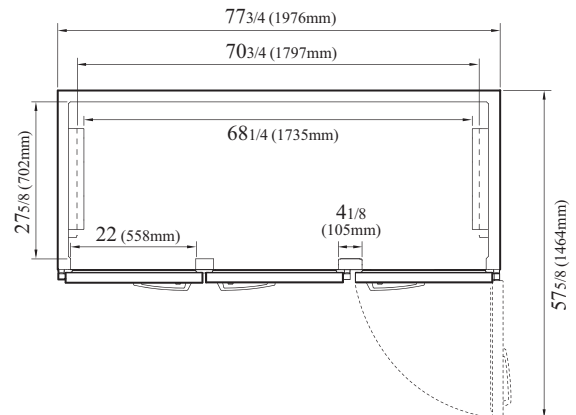

TOP VIEW

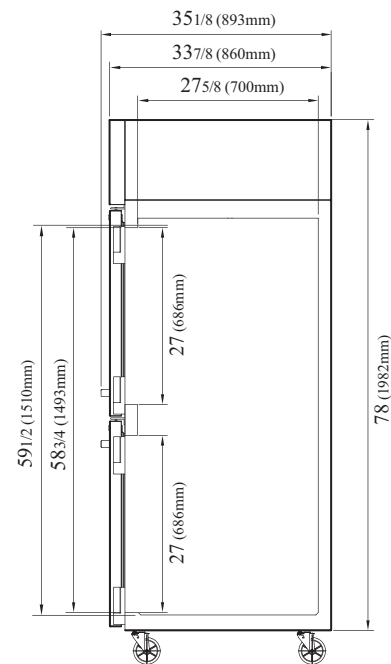

SIDE VIEW



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

RADIANCE

REFRIGERATION SYSTEM
Turbo air

TEXAKING

Continued product development may necessitate specification changes without notice.