
PX-Series







Version: 1.00

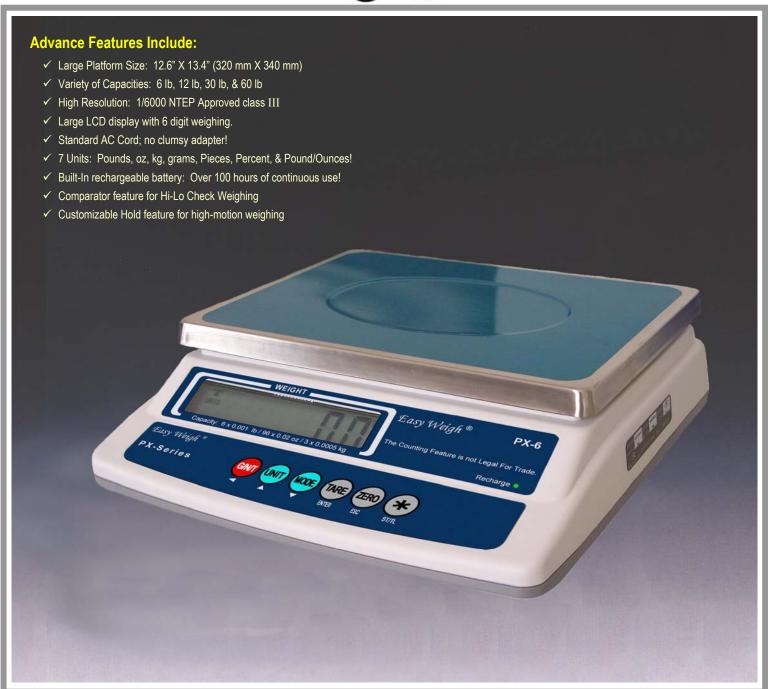

## PX-Series Feature Guide

- □ 1/6000 Resolution, Legal for Trade, NTEP CC # 06-036
- □ Large Stainless Steel Removable Platter
- Ultra Quick-Response Weight display
- Heavy Duty design
- □ Tough high quality UV-sealed keypad
- □ Large size heavy-duty platform

- □ Capacities: 6 lb, 12 lb, 30 lb, or 60 lb
- □ Large easy to read LCD Display
- User-friendly intuitive programming
- Quick operation keypad for high throughput
- □ Function keys: G/N/T, Unit, Mode, Tare, & Zero
- Internal power supply with long AC power cord



## Technical Specifications

1									
Models:		PX-6+	PX-6	PX-12+	PX-15	PX-30+	PX-30	PX-60+	PX-60
Capacities and Graduations:	lb	6 x 0.001	6 x 0.002	12 x 0.002	15 x 0.005	30 x 0.005	30 x 0.01	60 x 0.01	60 x 0.02
	oz	96 x 0.02	96 x 0.05	200 x 0.05	200 x 0.1	480 x 0.1	480 x 0.2	960 x 0.2	960 x 0.5
	kg			6 x 0.001	6 x 0.002	12 x 0.002	15 x 0.005	30 x 0.005	30 x 0.01
Maximum Tare:	Can tare up to Maximum Capacity								
NTEP Certificate Number:	Approved 1/6000 and 1/3000 resolution, Legal for Trade, CC #06-036								
A/D Conversion Rate:	50 Updates / second								
Connectivity:	RS-232 Port for connection to ECR, PC, or serial Printer								
Liquid Crystal Displays (LCD):	Weight: 6 Digits, 999.999 max								
Platter Size:	Width: 300 mm / 11.8"								
	Length: 225 mm / 8.9"								
Accreditation:	NTEP Class III, OIML, CE, ISO 9002								
Product Dimensions:	Width: 320 mm / 12.6"								
	Length: 340 mm / 13.4"								
	Height: 125 mm / 4.5"								
AC Specifications:	Internal Power Supply, (AC Cord) External Adap					ıl Adapter			
	120 Volts AC @ 60 Hz, AC Power Cord					120 Volt	120 Volts AC @ 60 Hz to 9VDC @ 800 mA		
Battery Specifications:	100 hrs with Backlight Off or 48 hrs with Backlight On (Continuous use.)								
Power Consumption & Fuse Rating:	Approximately 10 Watts / Fuse: 250 Volts, 1.5 Amp, 20 mm								

## **Options**

□ Foreign Power Cords & AC Adapters Available	□ Laundry Basket
□ Cigarette Lighter Car Adapter, (For External Adapter models ONLY)	☐ Wet-Proof Protective Overlay





istributed by:			