

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

RI REACH-IN REFRIGERATOR

RI18HC Solid Door Bottom Mount Refrigerator **Hydrocarbon Series**

MODEL: RI18HC



3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty**

CABINET CONSTRUCTION

- · Stainless steel exterior and interior
- Full electronic control
- Interior LED Light
- Four (4) shelves standard
- · One piece grille
- Self-closing door with 120° stay-open feature, on spring loaded
- Snap-in magnetic door gasket
- 3" Heavy duty casters standard

OPTIONS & ACCESSORIES

- · Epoxy shelves & clips
- 6" Casters or 6" legs optional
- · Wire shelf dividers
- · Right or left hinged door
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Maintains temperature between 36° and 38°F




















MODEL	RI18HC
EXTERNAL DIMENSIONAL DATA	
Width Overall	27 1/4"
Depth Overall with Handle	29 1/8"
Height Overall	72 1/4"
Number of Doors	1
Depth with Door Open 90°	52 ³ ⁄ ₄ "
Door Opening (in)	24" x 52 ¾"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	16.85
Internal Width Overall (in)	24 1⁄4"
Internal Depth Overall (in)	21 1⁄4"
Internal Height Overall (in)	53"
Number of Shelves	4
ELECTRICAL DATA	
Full Load Amperes 115/60/1	5.5
REFRIGERATION DATA	
Horsepower	1/4
Capacity (BTU/Hr)	1997
Heat Rejection (BTU/Hr)	2995.5
Charge (lbs/grams)	0.19/86
SHIPPING DATA	
Gross Weight (crated lbs)	322 lbs
Height - Crated	76"
Width - Crated	30"
Depth - Crated	32"

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bottom Mount Reach-In Solid Door

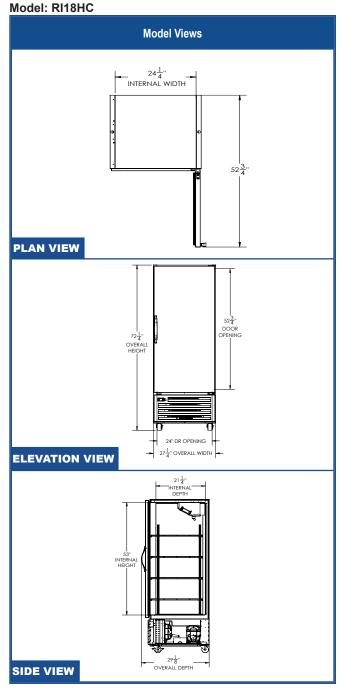

















Unit pre-wired at factory and include 8' long cord and plug set.



