



**“WE MAKE THE KITCHEN BETTER!”**

Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)  
www.atosa.com | www.atosausa.com  
California, Colorado, Florida, Georgia, Illinois,  
Massachusetts, New Jersey, Ohio, Texas, Washington

# Shallow Depth Back Bar Coolers

**MODELS:**  
SBB48GRAUS2 / SBB59GRAUS2 / SBB69GRAUS2

## Standard Features

- Black Exterior & Stainless Steel Interior
- Electronic temperature controller
- Maintains temperatures between 33°F– 40°F
- Heavy duty compressor with environmentally friendly R290 refrigerant
- Slide out compressor assembly for easy maintenance
- Recessed door handle(s)
- Interior light(s)
- Magnetic door gasket(s) standard for positive door seal
- Door lock(s) standard
- Pre-installed epoxy coated shelves
- Pre-installed casters

## Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf  
SBB48GRAUS2 - Top Left Shelf part#: W040237801 (Top Right Shelf, Bottom Shelves) W040237701
- SBB59GRAUS2 - Top Left Shelf part#: W040235801 (Top Right Shelf, Bottom Shelves) W040235701
- SBB69GRAUS2 - Top Left Shelf part#: W040238101 (Top Right Shelf, Bottom Shelves) W040238001

For the best results of food preservation we recommend setting your refrigerator between 33 °F - 40 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



**SBB48GRAUS2**



**SBB59GRAUS2**



**SBB69GRAUS2**



2 YEAR PARTS AND LABOR WARRANTY (US ONLY)  
5 YEAR COMPRESSOR PART WARRANTY (US ONLY)






**“WE MAKE THE KITCHEN BETTER!”**

Toll Free: 855-855-0399 Email: info@atosausa.com  
 www.atosa.com | www.atosausa.com  
 California, Colorado, Florida, Georgia, Illinois,  
 Massachusetts, New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Amps (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
SBB48GRAUS2	2	11.5	4	2	2.3	115/60/1	1/7	R290	48×24 <sup>1/2</sup> ×40 <sup>1/8</sup>	183	227
SBB59GRAUS2	2	15	4	2	2.3	115/60/1	1/7	R290	57 <sup>3/4</sup> ×24 <sup>1/2</sup> ×40 <sup>1/8</sup>	203	247
SBB69GRAUS2	2	18.6	4	2	2.3	115/60/1	1/7	R290	68×24 <sup>1/2</sup> ×40 <sup>1/8</sup>	225	276

## PLAN VIEW

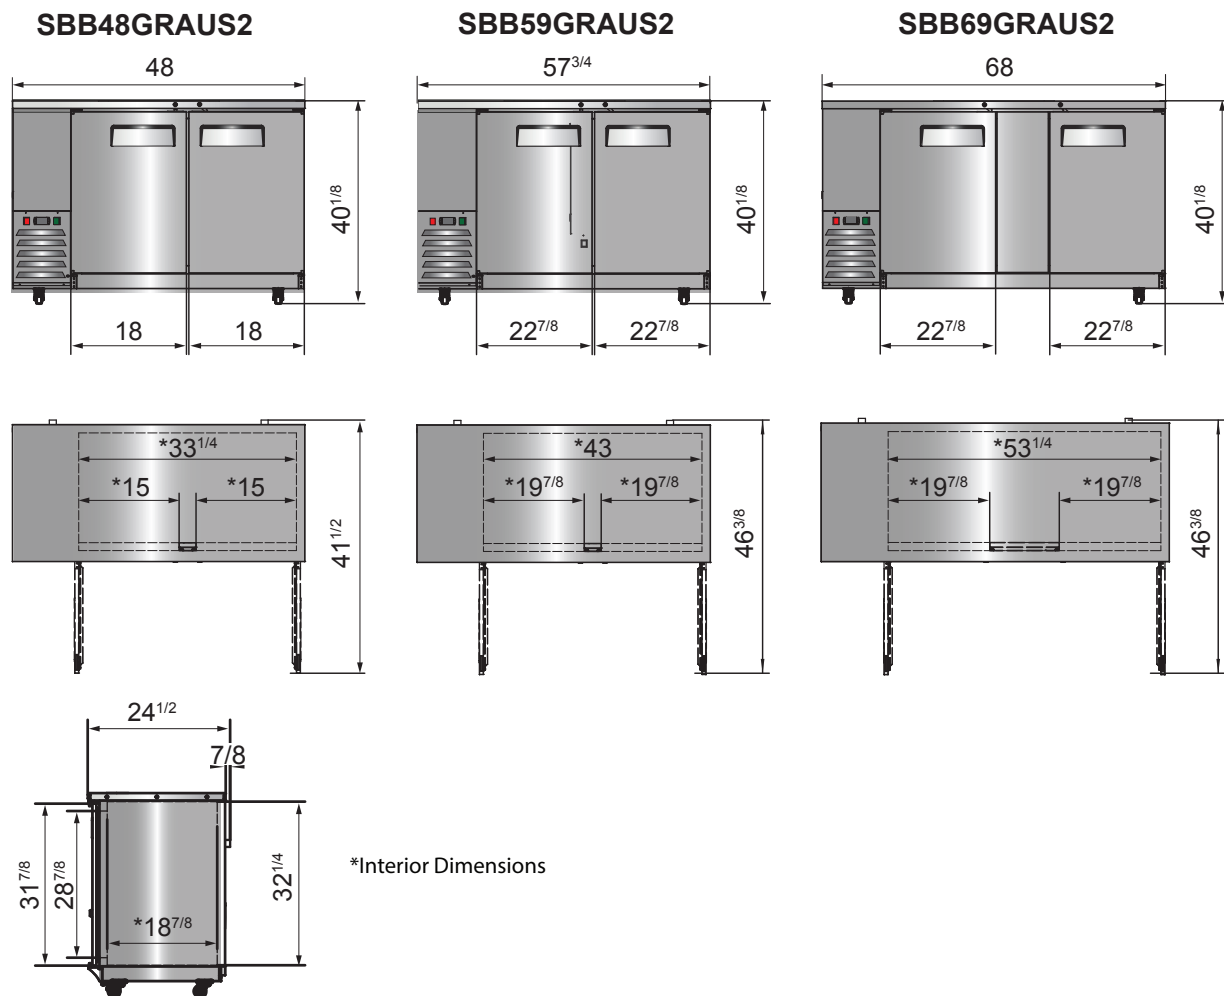

Epoxy shelves



Door lock



Temperature control



Recessed handles

