

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

–	
Droioot	
Project	

Model # : Item # :

Qty :

Underbar Equipment Super Deluxe Series

Available W/H :

Approval :

Bottle Coolers

Patented Self-Cleaning Condenser



This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess buildup outward and away.





____ FEATURES & BENEFITS =___

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Hydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Forced air cooling system

Positive guided forced air cooling system chills bottles on top first.

High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

Adjustable, heavy duty, PE (polyethylene) coated dividers

Side mount compressor unit

With compressors positioned on the side of the unit, our refrigerators can now be serviced without being moved. Our innovative, front breathing feature also allows this model to be highly efficient in narrow spaces.

Stainless steel cabinet construction

Super Deluxe (SD) models boast a stainless steel exterior (except galvanized steel back and bottom). SB models have an attractive wear-resistant black vinyl exterior. Heavy gauge stainless steel countertop and glide lids are perfect for sanitation and durability. The interior is stainless steel except galvanized steel top. Turbo Air Bottle Cooler model guarantees the utmost in cleanliness and long product life. It also adds a touch of style to the most refined setting.

- Rugged built-in removable bottle cap opener and cap catcher
- Large capacity cooler cabinet requires only minimum floor space
- Refrigerator holds 33°F ~ 38°F for the best in beverage preservation

ISO 9901/2008 Intertek Intertek						tek Intertek		
Model	Sliding Doors	CU./FT.	Capacity 12oz.btls. / 12oz.cans	# of Dividers	HP	AMPS	Crated Weight (lbs.)	$L \ge D^* \ge H^\dagger$ (inches)
TBC-36SD-N6 TBC-36SB-N6	1 1	8.5 8.5	12 / 15 Cases‡ 12 / 15 Cases‡		1/8 1/8	1.6 1.6	221 221	363/4 x 261/2 x 331/4 363/4 x 261/2 x 331/4

* Depth does not include 2" for cap catcher or 2" for rear spacers. † Height does not include 5" for caster height. ‡ Case capacity refers to 24 pack.

Model : TBC-36SD/SB-N6

Bottle Coolers

пΫ

(unit : inch)

Model : TBC-36SD/SB-N6

ELECTRICAL DATA					
Voltage	115/60/1				
Plug Type	(i) NEMA 5-15P				
Full Load Amperes	1.6				
Compressor HP	1/8				
Refrigerant	R-600a				
Cord Length (ft.)	8.5				
DIMENSIONAL DATA					
Capacity (12oz.btls./12oz.cans)	12 Cases / 15 Cases‡				
Net Capacity (cu. ft.)	8.5				
Ext. Length Overall (in.)	363/4 (933mm)				
Ext. Depth Overall (in.)*	261/2 (673mm)				
Ext. Height Overall (in.)†	331/4 (845mm)				
# of Dividers	2				
# of Casters	5EA				
Net Weight (lbs.)	190				
Gross Weight (lbs.)	221				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 2" for cap catcher or 2" for rear spacers.

+ Height does not include 5" for caster height.

‡ Case capacity refers to 24 pack.


• WARRANTY : 3 Year Parts and Labor Warranty Additional 2 Year Warranty on Compressor

STANDARD FEATURES

- Anti-corrosion coated evaporator
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set

OPTIONAL ACCESSORIES


- 1" caster, 1/2" diameter & 13 TPI: S28R813660 (non-brake)
- 2" caster for underbar series, ½" diameter: P0165B0100 (non-brake), P0165B0110 (w/ brake)
- 2.5" caster: 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 5" caster, ½" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- Leveling leg, 1/2" 13 TPI x 1.54": LFM1213566
- 6" adjustable stainless steel leg: P0121P0100

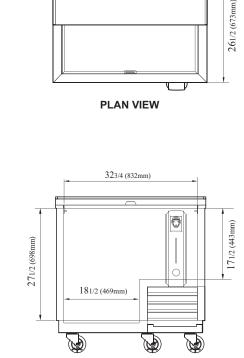

363/4 (933mm)

PLAN VIEW

FRONT VIEW



Ver.20190812



(GERMAN

KNIFE

Turbo Air : 800-627-0032 **GK** : 800-500-3519

Turbo air Texaking

■ Warranty : 800-381-7770 ■ AC : 888-900-1002

Turbo air