

4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Drainat	
Project	
	•

Model # : Item # :

Qty :

Available W/H :

Approval :

# Swing Door Merchandisers



## Bydrocarbon refrigerants (R-600a)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

### Hot gas condensate system

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

### LED advertising panel

LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

### Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Lowemissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

### High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, HCFC free polyurethane insulation.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- LED interior lighting
- Refrigerator holds 33°F ~ 38°F for the best in beverage preservation



# Model : TGM-22RV-N6 TGM-22RVB-N6



TGF-22RV-N6

Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	$L \ge D^* x H$ (inches)	
TGM-22RV(B)-N6	1	20.3	4	1/5	2.2	243	283/4 x 275/8 x 797/8	

\* Depth does not include 1-3/8" for door handle.

# Swing Door Merchandisers

# Model : TGM-22RV(B)-N6

ELECTRICAL DATA				
Voltage	115/60/1			
Plug Type	(i) NEMA 5-15P			
Full Load Amperes	2.2			
Compressor HP	1/5			
Cord Length (ft.)	7			
Refrigerant	R-600a			
DIMENSIONAL DATA				
# of Doors	1			
Net Capacity (cu. ft.)	20.3			
Ext. Length Overall (in.)	283/4 (732mm)			
Ext. Depth Overall (in.)*	275/8 (702mm)			
Ext. Height Overall (in.)	797/8 (2028mm)			
Int. Length Overall (in.)	241/8 (613mm)			
Int. Depth Overall (in.)	235/8 (600mm)			
Int. Height Overall (in.)	621/8 (1580mm)			
# of Shelves	4			
Shelf Size (LxD) (in.)	251/2 x 193/8			
Bottle Capacity	280 (full)			
Net Weight (lbs.)	225			
Gross Weight (lbs.)	243			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

\* Depth does not include 1-3/8" for door handle.

## • WARRANTY : 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

## STANDARD FEATURES

- Anti-corrosion coated evaporator
- White color cabinet & black color frame on door
- Black color cabinet available

### OPTIONAL ACCESSORIES

- 2.5" caster ½" diameter & 13 TPI (special stem nuts rquired, sold in separate): 30265H0100 (non-brake), 30265H0200 (w/ brake)
- 4" caster, ½" diameter & 13 TPI (special stem nuts rquired, sold in separate): G8F6500101 (non-brake), G8F6500201 (w/ brake)
- Special stem nut for caster installation (EA): 30260K0200 (1/2", 13 thds)

(GERMAN)

KNIFE


- Additional PE coated wire shelf: 30278K0600
- Gravity feed shelf: 30278H0200
- Price tag channel: P0122K5200 (21"L)
- White and black color cabinet available
- Sign panel (blank): 30214H0112

#### Ver.20190926



283/4 (732mm

(unit : inch)

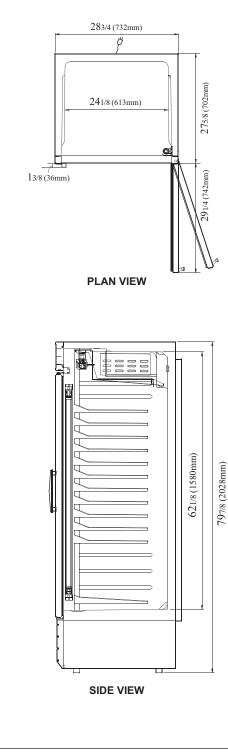

**Turbo Air** : 800-627-0032 **GK** : 800-500-3519

Turbo air Texaking

**Warranty** : 800-381-7770 **AC** : 888-900-1002

Turbo air