

## **Datasheet**

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

### **UBB-24-48G 48" Narrow Depth Black Swing Glass Door Back Bar Cooler**



### **FEATURES**

- ▶ Durable S/S top, interior walls, floor and ceiling
- ▶ Vinyl on steel in black finish exterior
- ▶ Refrigeration system keeps food at safe temperatures
- ▶ Electronic control system
- ▶ Adjustable heavy-duty PVC coated shelves
- ▶ Self-closing doors with locks
- Swing doors
- Narrow depth
- ▶ LED interior lighting
- ▶ Removable installation board
- ▶ Pull out door handle
- ▶ Hydro-Carbon R290 refrigerant

This Coldline commercial back bar cooler is perfect for restaurants, delis, bakeries, or cafes. It keeps your food products at safe temperatures.

cETLus Listed

► ETL Sanitation Listed Conforms to UL & NSF Standards Intertek





S Restaurant Group is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.



# **Datasheet**

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

## **TECHNICAL DATA**

#### **DIMENSIONS**

48.8"W x 24.4"D x 35.6"H
10.0 W X Z 1.1 D X 55.0 11
36"W x 20"D x 31"H
51"W x 27.5"D x 41.75"H
35.3"
(2) ½ kegs
11.8 cu. ft.
231 lb.
282 lb.

#### **ELECTRICAL**

Voltage	115
Hertz	60
Phase	1
Amps	2.88
Plug Type	NEMA 5-15P
Power Cord Length	84"

#### **COOLING**

Temperature Range	33°F to 41°F
Refrigerant	R290
Max. Ambient Temp	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

#### **CONSTRUCTION**


Exterior Material	Coated Steel
Exterior Color	Black
Interior Material	304 Stainless Steel
Insulation Material	Foamed-in-Place Polyurethane
Door Style	Swing
Door Type	Glass
Depth Style	Narrow
Shelf Size	(4) Qty: 17.6"W x 18.1"D
Shelf Load Capacity	90 lb.
Shelf Material	Epoxy Coated Steel
Adjustable Shelf	Yes
Interior Light	L.E.D


## **DIAGRAM**


MODEL:UBB-24-48G
MFR MODEL:UBB-24-48G-HC



**NEMA 5-15P** 





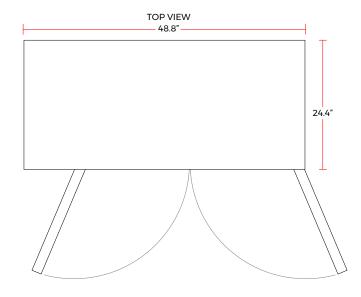

Page 166