



ELITE SERIES REFRIGERATION

SERVING THE FOOD INDUSTRY SINCE 1951

ELITE 19-INCH GLASS DOOR REFRIGERATION

Model: VR04 Item 45801



Ideal for refrigeration for places with limited spaces.

KEY FEATURES

PA refrigeration system

Ensures rapid and effective cabinet cool down and maintains consistent temperature range with minimum energy consumption.

Electronic Temperature Controller

Assures the optimal performance of the cooler, delivering product temperature ideal for consumption.

High Efficiency Glass Door

Equipped with double panel glass and low-e film to reduce condensation. Door hinge is equipped with a self-closing system to ensure the door closes safely, and returns to original position, without any damages.

• LED Lighting System

Our LED system uses a fraction of the energy of regular fluorescent lights and requires no replacement for up seven years.

CFC and HFC Free Cyclopentane Foam

Eco-friendly, recyclable and high efficiency cabinet insulation.



Establishing a NEW STANDARD in the commercial refrigeration industry.













ELITE SERIES REFRIGERATION

ELITE 19-INCH GLASS DOOR REFRIGERATION












COMMERCIAL REFRIGERATOR AND/OR FREEZER 9Z42



NSF/ANSI 7 COMMERCIAL REFRIGERATOR AND/OR FREEZER 20YY

NEMA 5 - 15 125 VAC / 15 AMP



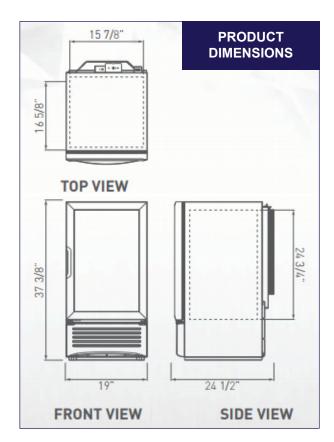

TECHNICAL SPECIFICATIONS

ITEM NUMBER

MODEL

DESCRIPTION

VOLUME CAPACITY

DOORS

SHELVES

SHELF SIZE

CAPACITY TEMPERATURE

RANGE

45801

VR04

Elite 19-inch Glass Door Refrigeration

4 cu. ft. / 113.3 L

1

3

15 1/4" x 14 5/8" 387.35 x 371.47 mm

20 oz bottle capacity - Flat: 50

0°C - 7°C / 32°F - 44.6°F

ENERGY CONSUMPTION

ELECTRICAL

HORSEPOWER

AMPS

WEIGHT

INTERNAL DIMENSIONS (WDH)

DIMENSIONS (WDH)

1.210 kWh/day

115V / 60Hz

1/6 HP

2.1 A

96.3 lbs. / 43.68 kg.

15 7/8" x 16 5/8" x 24 3/4" 403.2 x 422.3 x 628.65 mm

19" x 24.5" x 37 3/8" 482.6 x 622.3 x 949.3 mm

BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.



OMCAN INC.

Telephone: 1-800-465-0234 Fax: (905) 607-0234 Email: sales@omcan.com Website: www.omcan.com















