

Project:	AIA#
Item:	
Location:	SIS#
Annroyed:	

# **GF BAR EQUIPMENT**

GF48HC Glass and Plate Froster

Hydrocarbon Series

MODEL: GF48HC-B



3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty** 

#### **CABINET CONSTRUCTION**

- Exterior features durable black painted steel
- Interior construction utilizes galvanized steel
- Top includes easy glide, stainless steel lids (1) and stainless steel counter top with edge
- Top loading
- Four (4) adjustable wire dividers
- Two (2) shelf ledges standard with three (3) mounting points
- Flexibility in design provides for plate storage and chilling
- Automatic defrost of coil is standard
- Built-in condensate evaporator system
- No floor drain or additional plumbing is needed

### **OPTIONS & ACCESSORIES**

- · Stainless steel interior
- Locks
- Remote option\* (refrigerant must be specified at time of order, see note on back on page)

### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- · Epoxy coated evaporator coil
- Chills glasses and plates at 0°F and below (factory setpoint is 0°F)
















MODEL	GF48HC-B	
EXTERNAL DIMENSIONAL DATA		
Width Overall	48"	
Depth Overall	26 1/8"	
Height Overall	33 %"	
Number of Lids	2	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	9.65	
Internal Width Overall (in)	44"	
Internal Max Depth Overall (in)	22"	
Internal Height Overall (in)	18 ¼"	
Number of Dividers	4	
12 oz. Mugs Chilling Capacity	164	
8" Plate Chilling Capacity	250	
ELECTRICAL DATA		
Full Load Amperes	3.5	
REFRIGERATION DATA		
Horsepower	1/2	
Capacity (BTU/Hr)	1624	
Heat Rejection (BTU/Hr)	2436	
Charge (lbs/grams)	0.1323/60	
SHIPPING DATA		
Gross Weight - Crated	288 lbs	
Height - Crated	38"	
Width - Crated	52"	
Depth - Crated	30"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

## **Bar Equipment - Glass and Plate Froster** Model: GF48HC-B

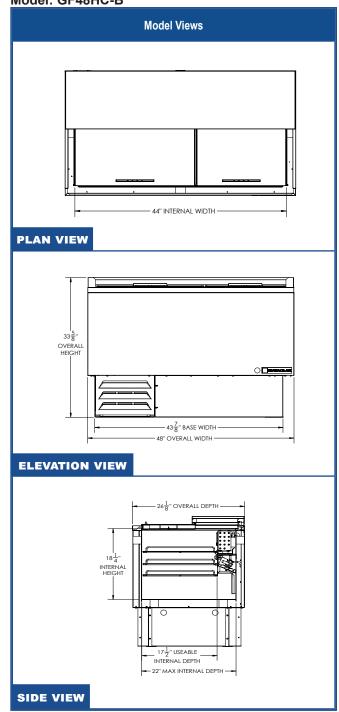

### **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord and plug set.











