



**GAS**

PRO SERIES | PROTECTION OVEN

**IMPERIAL**



## PRV

- All stainless steel exterior
- In shot burners
- Highly sensitive Ametek thermostat control system
- 1/2 HP, 2 speed motor
- Cool down feature
- Cord and plug included
- Removable rack guide assembly
- Five rack positions
- Three oven racks included
- Stainless steel oven door handle
- Doors with tempered glass windows
- Two HID oven interior lights with momentary switch
- Full porcelain interior
- Stackable up to three units high
- Can be used as a base for countertop units or built-in as part of Spec and Pro Series ranges
- Available in Natural and LP gas

Model Numbers

PRV-1  
PRV-2  
PRV-3

**PRV-1**



**PRV-3**






**PRV-2**





**GAS**

PRO SERIES | PROTECTION OVEN

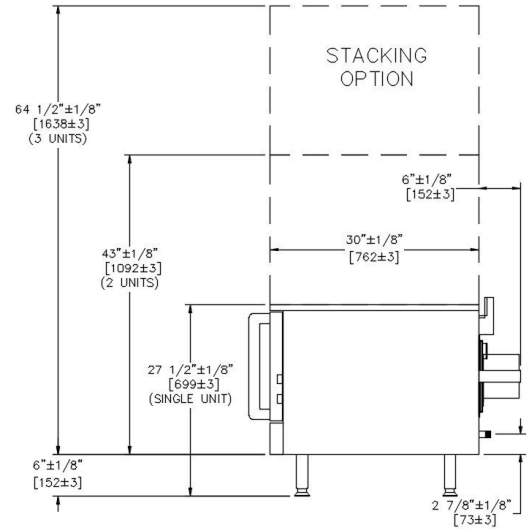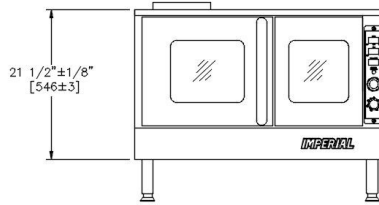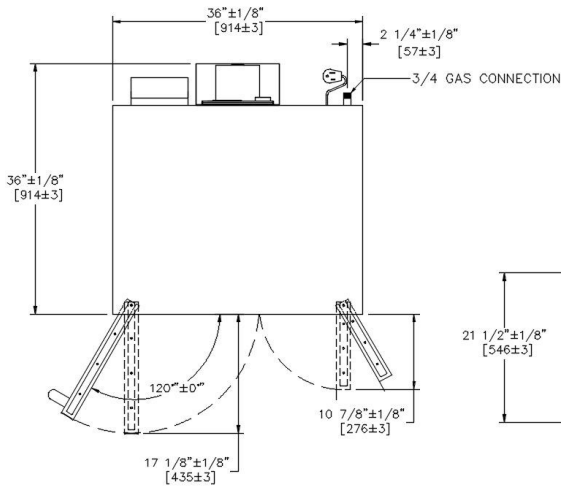

**PRV**

MODEL	DESCRIPTION	WIDTH	HEIGHT NO LEGS	DEPTH	GAS OUTPUT BTU	SHIP WEIGHT	
						LBS	KG
PRV-1	SINGLE DECK	36"	21½"	39½"	52,000	425	193
PRV-2	DOUBLE DECK	36"	49"	39½"	104,000	850	386
PRV-3	TRIPLE DECK	36"	70½"	39½"	156,000	1275	579

MODEL	DIMENSIONS	CRATED DIMENSIONS
PRV-1	36" W X 30" D X 27-1/2" H 915MM X 762MM X 699MM	40" W X 32" D X 38-1/2" H 991MM X 813MM X 978MM
PRV-2	36" W X 30" D X 49" H 915MM X 762MM X 1245MM	40" W X 32" D X 52" H 991MM X 813MM X 1321MM
PRV-3	36" W X 30" D X 70-1/2" H 915MM X 762MM X 1791MM	39" W X 32" D X 72-1/4" H 991MM X 813MM X 1835MM

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)

**UTILITY REQUIREMENTS GAS MODELS**

MODEL	VOLTAGE	PHASE	HZ	AMPS
PRV	120	1	60/50	9

**PRV OPTIONS**

- Marine ledge  
Heavy duty Imperial casters
- Solid doors available at no additional charge, must specify at ordering
- Extra racks
- 2 unit stand
- 1 unit stand

**CLEARANCE**

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 6" from combustible surfaces

