

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

RI REACH-IN REFRIGERATOR

RI18HC Glass Door Bottom Mount Refrigerator **Hydrocarbon Series**

MODEL: RI18HC-G



3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty**

CABINET CONSTRUCTION

- · Stainless steel exterior and interior
- Full electronic control
- Interior LED Light
- Four (4) shelves standard
- · One piece grille
- Self-closing door with 120° stay-open feature, on spring loaded
- Snap-in magnetic door gasket
- 3" Heavy duty casters standard

OPTIONS & ACCESSORIES

- · Epoxy shelves & clips
- 6" Casters or 6" legs optional
- · Wire shelf dividers
- · Right or left hinged door
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- · Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- · Epoxy coated evaporator coil
- Maintains temperature between 36° and 38°F


















MODEL	RI18HC-G	
EXTERNAL DIMENSIONAL DATA		
Width Overall	27 1/4"	
Depth Overall with Handle	29 1/8"	
Height Overall	72 1/4"	
Number of Doors	1	
Depth with Door Open 90°	52 ¾"	
Door Opening (in)	24" x 52 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	16.85	
Internal Width Overall (in)	24 1/4"	
Internal Depth Overall (in)	21 1/4"	
Internal Height Overall (in)	53"	
Number of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	5.5	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1997	
Heat Rejection (BTU/Hr)	2995.5	
Charge (lbs/grams)	0.19/86	
SHIPPING DATA		
Gross Weight (crated lbs)	367 lbs	
Height - Crated	76"	
Width - Crated	30"	
Depth - Crated	32"	

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Bottom Mount Reach-In Glass Door Model: RI18HC-G

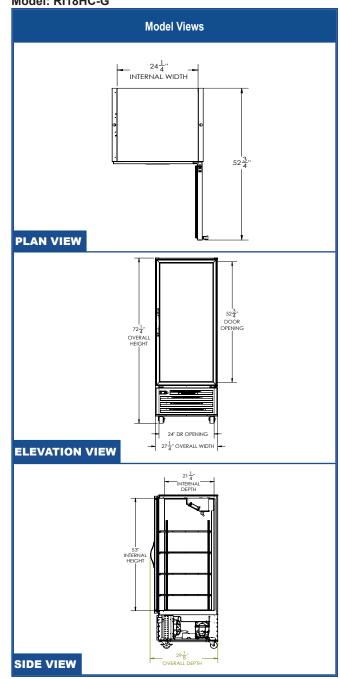

















Unit pre-wired at factory and include 8' long cord and plug set.

